

HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C





Sleeve: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Connecting Pin: $\phi 0.47$ mm
 Insulator Material: PPS+30%G.F.(UL94V-0)

Ordering Information

3510-302 XX M XX 071 X 1

No. of Pin: 2-50Pin
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=1.5u"Gold, G5=30u"Gold
 Packing: A=Tray, T=Tube

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

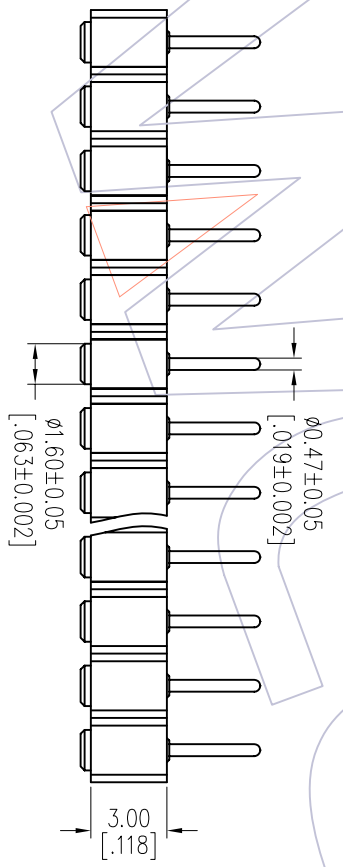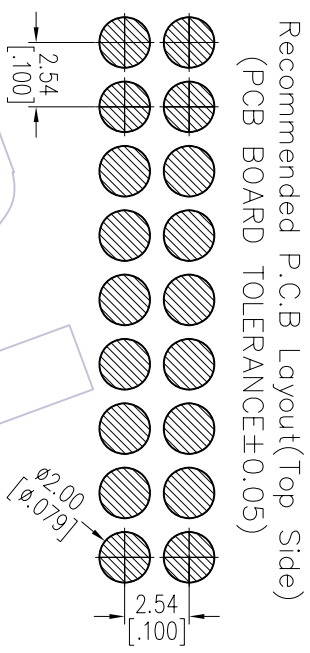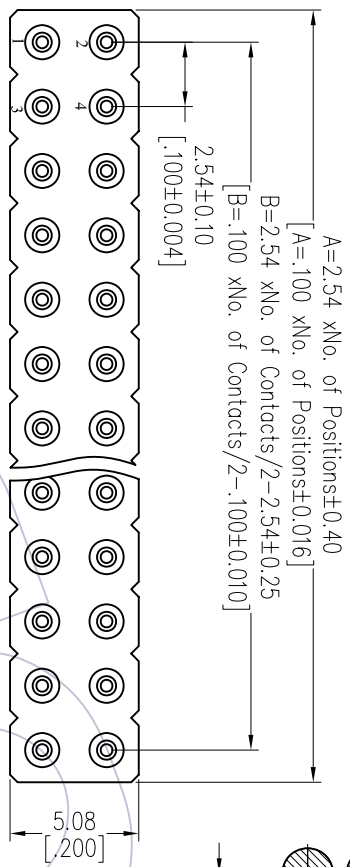

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.		WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com		
XX	±0.40	JYHuang	CHECK	2012/10/22	mm	3510-302XXMX071X1	1/1	1/1	Customer NO.					
X.XX ±0.25		CHECK		DATE	SIZE	TITLE:		SHEET		2.54mm MACHINED PIN HEADER				
X.XXX ±0.15		CHECK		DATE	A4	DU/AL ROW 180° SMT lh=3.00 L=7.1		1/1						
Angle ± 3°		APPROVE		DATE	PROJ.			PROJ.						
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL								
A0	2012/10/22	NEW												