




NOTES:  
 No. of Positions: 8 Pin  
 Housing Material: PBT  
 Wire Size Range: 20-16AWG(1.0-1.5mm<sup>2</sup>)  
 Operation Temperature: -40°C to +125°C  
 Waterproof grade: IP68/IP69K(After installation)






Serial Number	Part Name	Material	Consumption
1	Line end shell	PBT / BLACK	1
2	Line end sealing ring	Silicon rubber	1
3	Main body	PBT / WHITE	1
4	Main sealing ring	Silicon rubber	1
5	Lock cover	PBT / RED	1


Assembly sketch

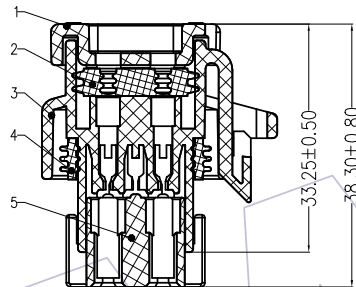

Section A-A

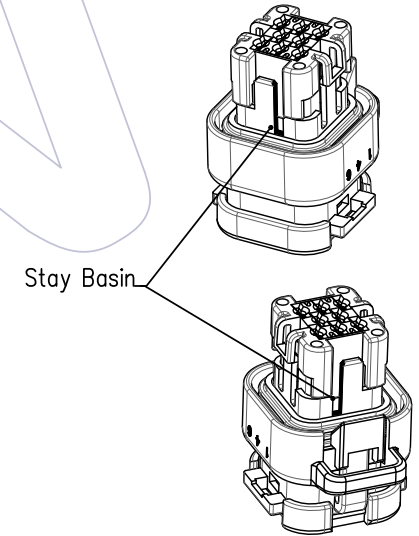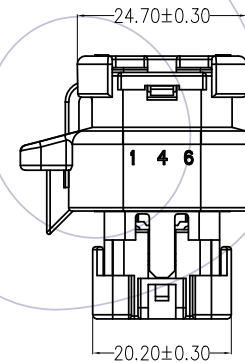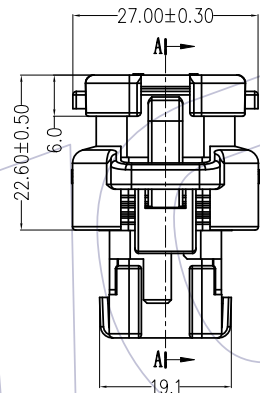

Stay Basin



First Pin

### Ordering Information


74040-3FC 008 A N 00 W A 2 W

No. of Pins:  
008=8P

Body Material:  
A=PBT

A=Tray

W=W/T WCON LOGO  
Blank=W/O LOGO



Matched Plug Number:

- 74040-3MS008ABXXNA2 (W)
- 74040-3MS008ABXXJA2 (W)
- 74040-3MR008ABXXNA2 (W)
- 74040-3MR008ABXXJA2 (W)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DRAW XSR	DATE	SCALE	FIT	PART NO.
A3	2021/09/03	Modify;ADD W/O LOGO SPEC. &P/N						2021/09/03			74040-3FC008AN00WA2 (W)
A2	2019/03/18	Modify		X.X	±0.40						
A1	2018/11/29	Modify		X.XX	±0.25						
A0	2018/09/01	NEW		X.XXX	±0.15						
				Angle	± 3'						

TITLE:  
4.0X4.0 three row car connector  
line end 8P socket

Customer NO.

**WCON**  
 Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: salesks@wcon.com