

HSF




NOTES:
 Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Ordering Information

1320-11 XX XX M XXX C R XX

No.of Pins	Contact Plating	Pin Length	Insulator	Packing	Series No.
02-50	G0=Gold Flash	L=B+D+2.0+ $\frac{W}{2}$	C=PA9T	A=Tray	01-99
	G3=10u"Gold	Std:062=6.2		T=Tube	
	G4=15u"Gold	073=7.3		P=Tube+CAP	
	G5=30u"Gold	083=8.3		R=Tape&Reel+CAP	
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

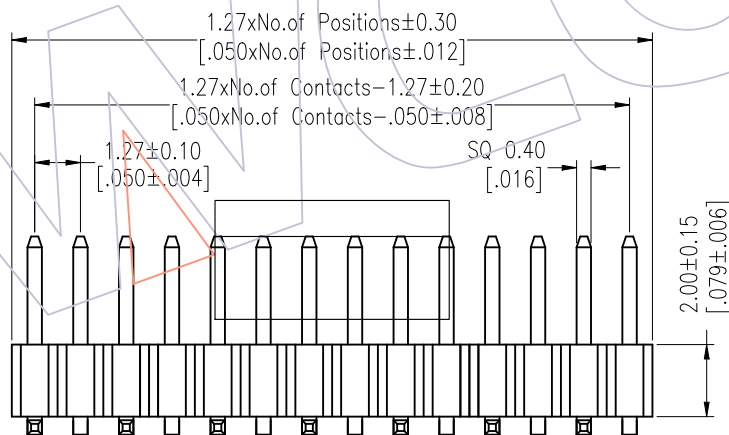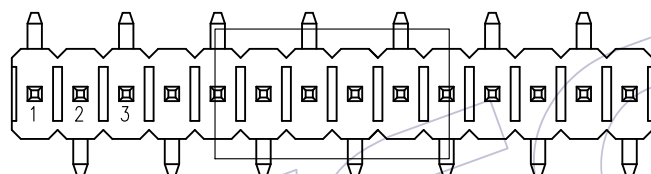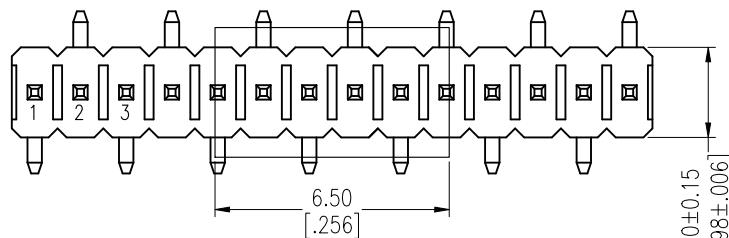

Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE±0.05)

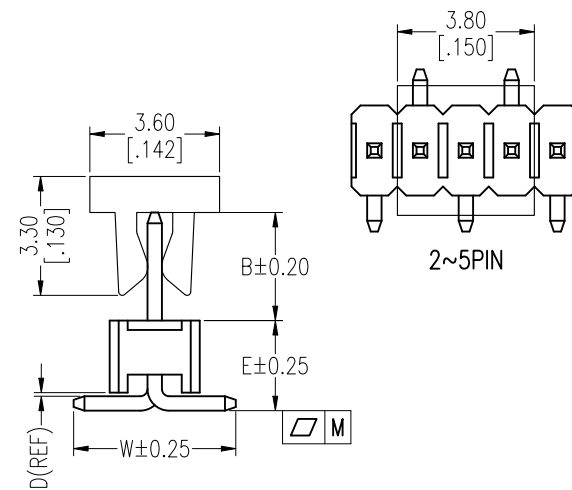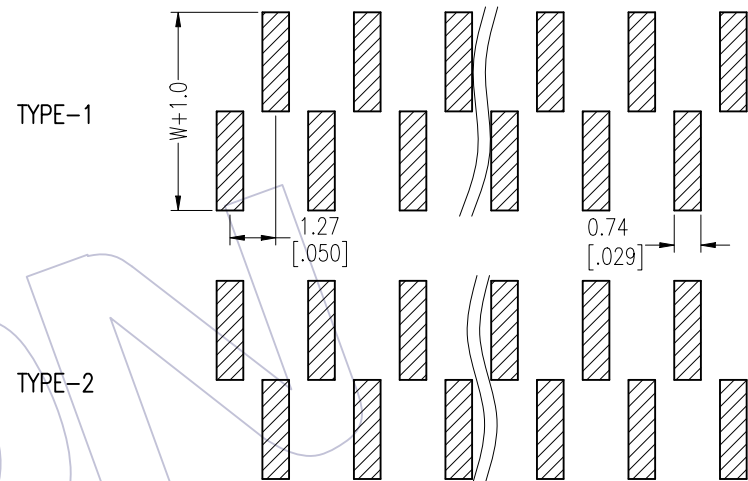

Item	Pin Length	W	E	B	Mating
Standard	6.2	4.50	2.50	1.90	2321
	7.3	4.50	2.50	3.00	2334
	8.3	4.50	2.50	4.00	2344
Alternate					

PIN(PerRow)	2-15P	16-30P	31-50P
M	0.10	0.15	0.18

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2023/02/02	Add Flatness	△2	Du Ying	X.X ±0.40	2023/02/02	UNIT	mm [inch]	1320-11XXXXMXXXCXXX △1
A1	2018/01/17	MODIFY PART NO.	△1	William Chen	X.XX ±0.25	DATE	SIZE	A4	TITLE:
A0	2012/03/22	NEW	-----	-----	X.XXX ±0.15	DATE	SHEET	1/1	1.27 Pin Header, SINGLE ROW, SMT, H=2.0
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DIM TOL	DATE	PROJ.	Customer NO.	

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com