
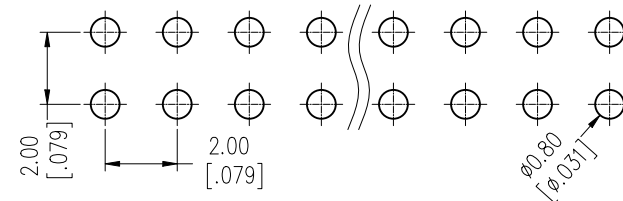


HSF

NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) $\Delta 2$

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)


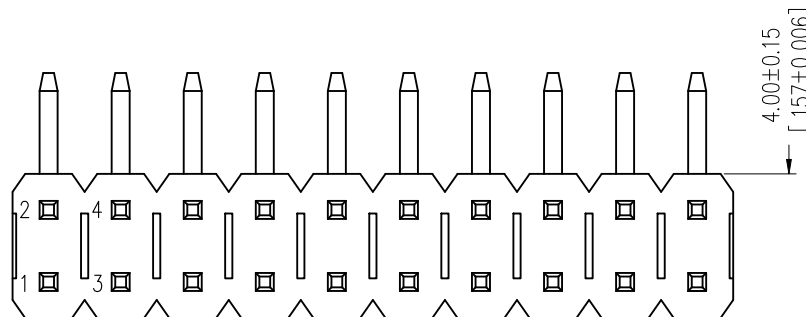


Ordering Information

1215-12 XX XX R XXX C 0 XX $\Delta 1$

$\Delta 2$ $\Delta 1$

No. of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:02~40	G0=Gold Flash	L=A+B+D+2.5	Material	0=PE Bag	01~99
	G3=10u"Gold	Standard:100=10.0	C=PA9T	T=Tube	
	G4=15u"Gold				
	G5=30u"Gold				
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

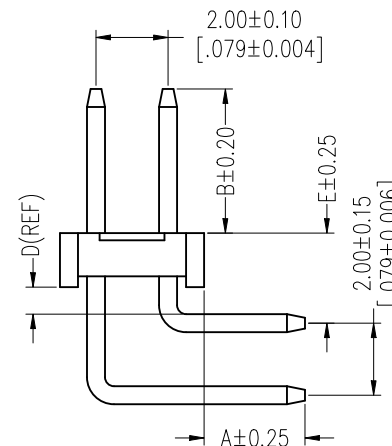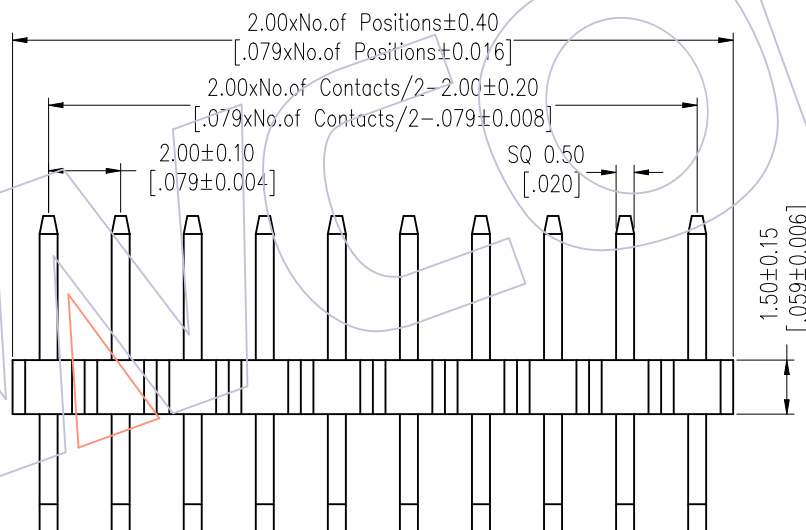

Item	Pin Length	A	E	B	Mating
Standard	10.00	2.80	2.50	4.00	2240 2243 2263 2272
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2020/06/11	Modify Pin 02~40P	$\Delta 3$	OPERATION	Da Ying	2020/06/11	UNIT	mm	1215-12XXXXRXXXCOXX $\Delta 1$
A2	2019/02/28	Modify	$\Delta 2$	x.X	Da Ying		SIZE	A4	TITLE:
A1	2018/01/18	Modify P/N	$\Delta 1$	x.XX	CHECK		SHEET	1/1	PH2.00 DUAL ROW
A0	2012/04/18	NEW		x.XXX	APPROVE		PROJ.		90° H=1.5 CONCAVE BENDING
				Angle	DATE				Customer NO.
				DIM	TOL				

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com