
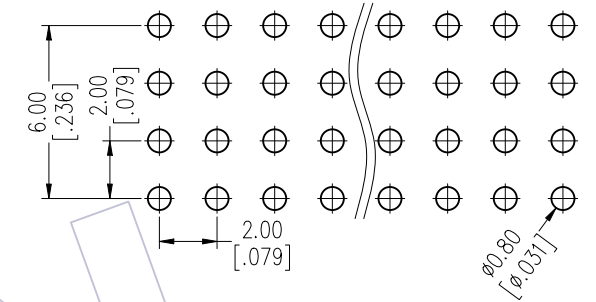


HSF

NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) Δ
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

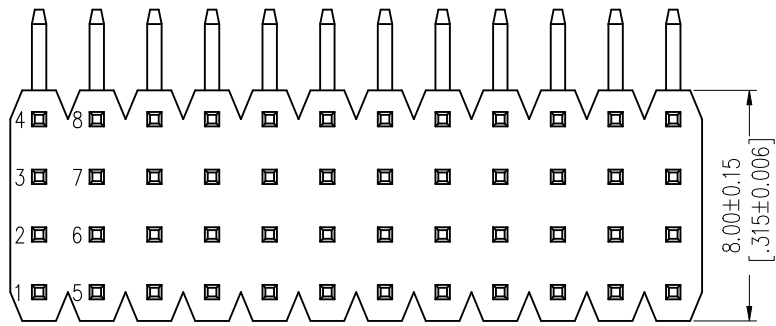

Ordering Information

1215-14 XX XX R XXX C 0 XX Δ

Δ 3
 No. of Pins Contact Plating Pin Length(Short) Insulator Packing Series No.
 Per Row: 04~40 G0=Gold Flash L=A+B+D+2.5 Material 0=PE Bag 01~99
 G3=10u"Gold Standard: 100=10.0 C=PA9T T=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin
 SM=Matte Tin

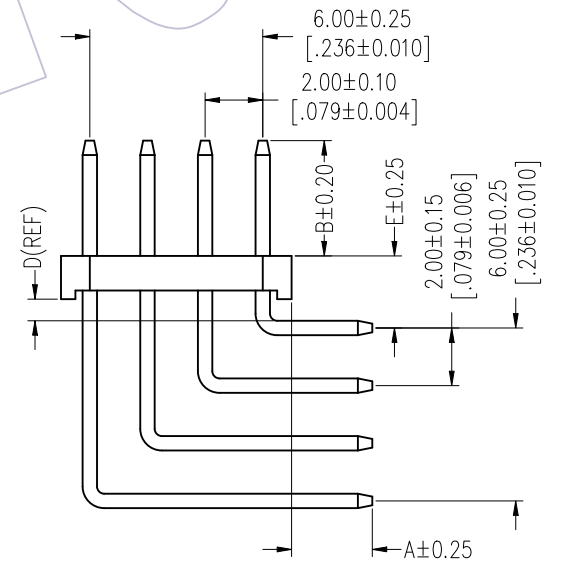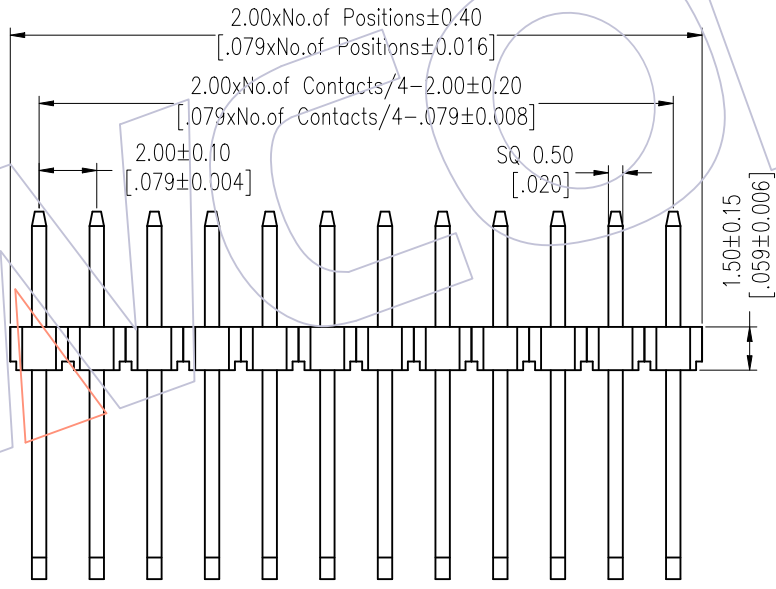

Item	Pin Length	A	E	B	Mating
Standard	10.00	2.80	2.50	4.00	2263
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2020/06/12	Modify Pin 04~40P	Δ 3	OPERATION	Du Ying	2020/06/12	UNIT	mm	1215-14XXXXRXXXCOXX Δ
A2	2019/02/28	Modify	Δ 2	x.X	Ding		SIZE	A4	TITLE:
A1	2018/01/18	Modify P/N	Δ 1	x.XX	CHECK		SHEET	1/1	PH2.00 FOUR ROW
A0	2012/04/18	NEW		x.XXX	APPROVE		PROJ.		90° H=1.5 CONCAVE BENDING
				Angle	DATE				Customer NO.
				DIM	TOL				

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com