
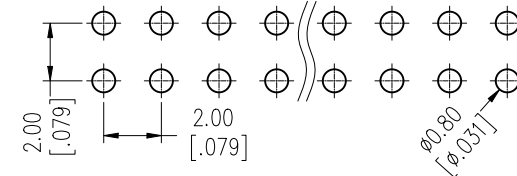


HSF

NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) Δ
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

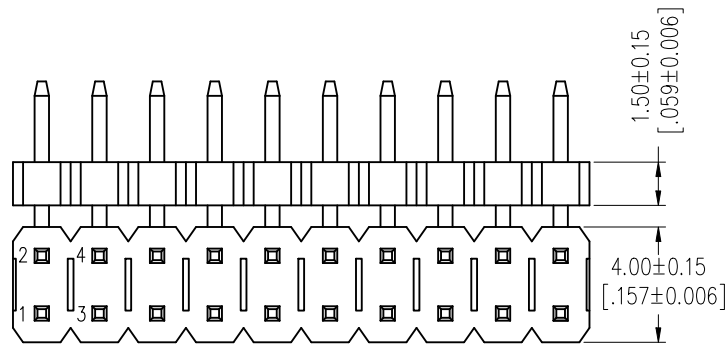

Ordering Information

1215-22 XX XX R XXX C 0 XX Δ

Δ No. of Pins Contact Plating Pin Length(Short) Insulator Packing Series No.
 Per Row: 02~40 G0=Gold Flash L=A+B+D1+D2+3.2 Material 0=PE Bag 01~99
 Standard: G3=10u"Gold G4=15u"Gold G5=30u"Gold C=PA9T T=Tube
 S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin
 SN=Tin SM=Matte Tin

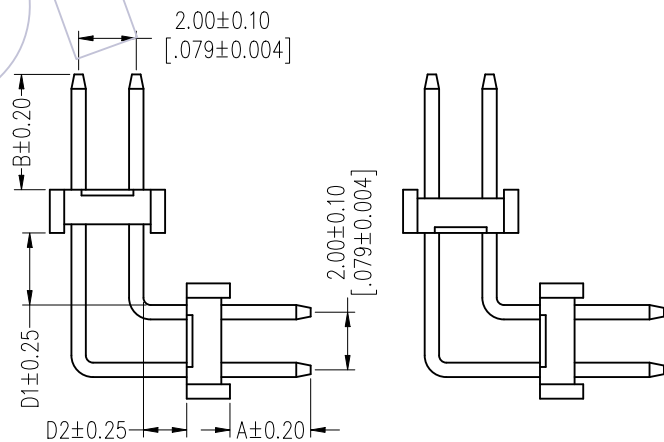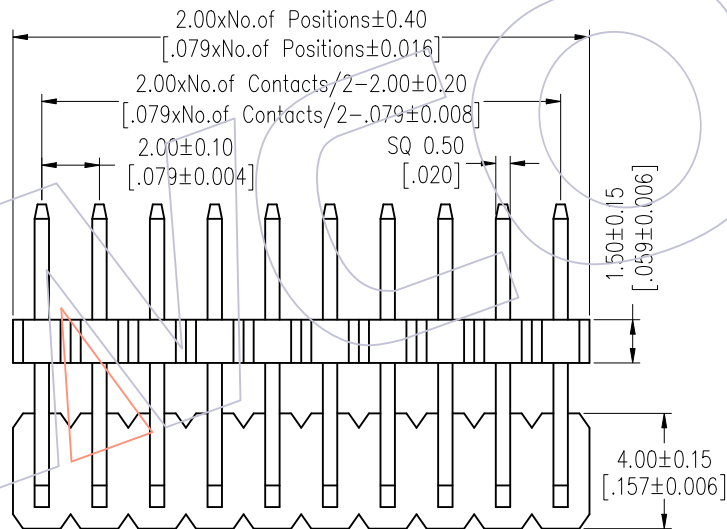

TYPE 3

TYPE 4

Item	Pin Length	A	D1	B	D2	Mating
Standard	---	2.80	---	4.00	---	2240 2243 2263 2272
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2020/06/12	Modify Pin 02~40P	Δ	Drawing	Drawing	2020/06/12	UNIT	mm	1215-22XXXXRXXXCOXX Δ
A2	2019/03/04	Modify	Δ	Dwg	CHECK	DATE	SIZE	A4	TITLE: PH2.00 DUAL ROW DOUBLE PLASTIC 90° H=1.5 MIDDLE BENDING
A1	2018/01/18	Modify P/N	Δ	---	APPROVE	DATE	SHEET	1/1	Customer NO.
A0	2012/04/18	NEW	---	---			PROJ.		

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com