
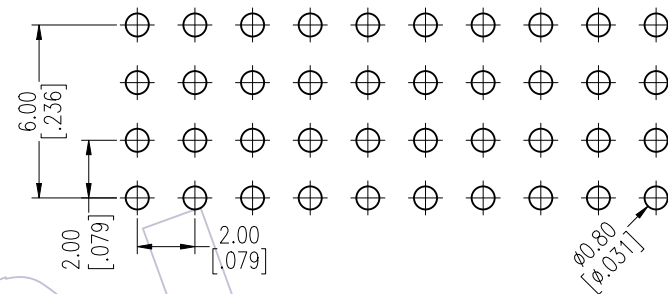


# HSF

NOTES:  
 Rated Current:2.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

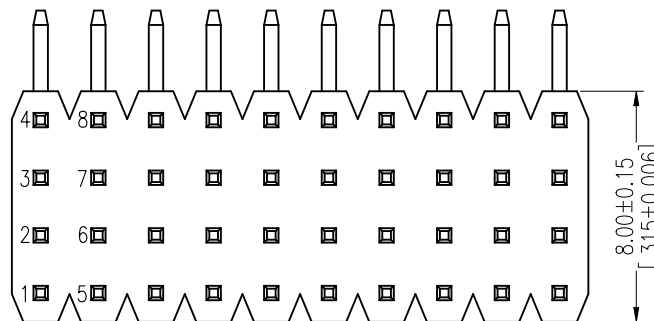

## Ordering Information

1220-14 XX XX R XXX C 0 XX

No.of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:04-40	G0=Gold Flash	L=A+B+D+3.0	Material	0=PE Bag	01-99
	G3=10u"Gold	Standard:105=10.5	C=PA9T	T=Tube	
	G4=15u"Gold				
	G5=30u"Gold				
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

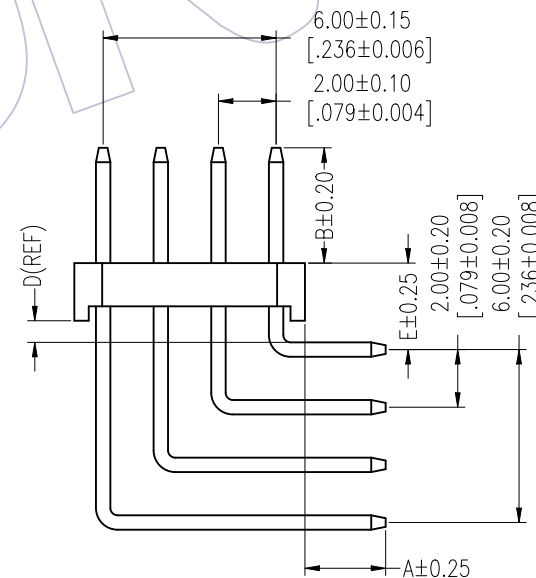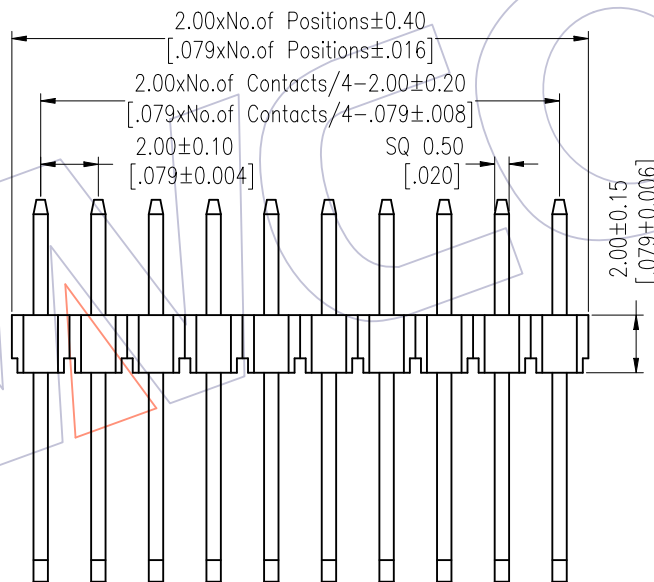

Item	Pin Length	A	E	B	Mating
Standard	10.50	2.80	3.00	4.00	2263
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				X.X	±0.40	2018.01.19	UNIT	mm	1220-14XXXXRXXXCOXX
A1	2018/01/19	Modify P/N		X.XX	±0.25	DATE	SIZE	A4	TITLE:
A0	2012/04/26	NEW		X.XXX	±0.15	DATE	SHEET	1/1	PH2.00 FOUR ROW 90°H=2.0 CONCAVE BENDING
				Angle	± 3'	DATE	PROJ.		Customer NO.
				DIM	TOL				

# WCON

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com