
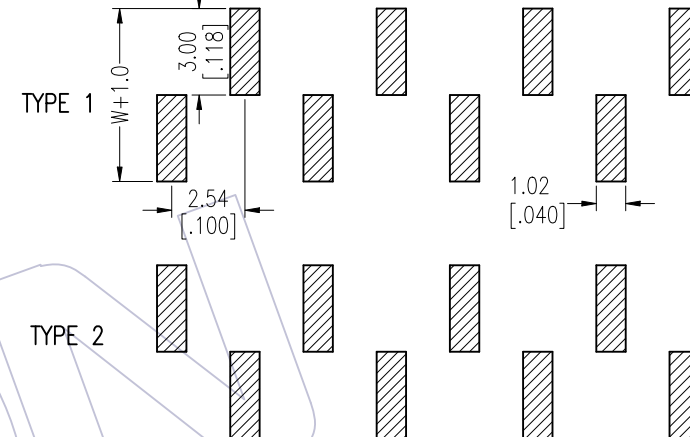


# HSF

NOTES:  
 Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

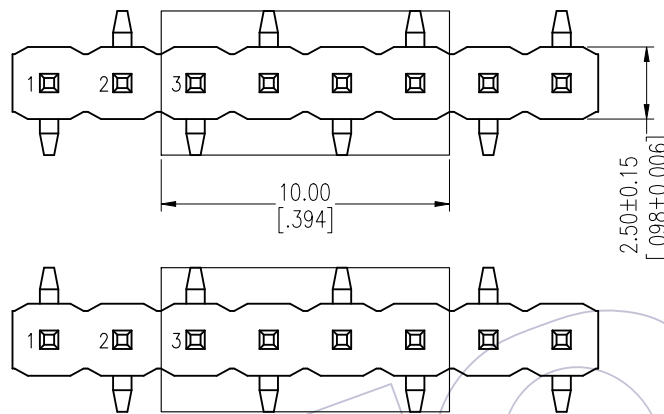

## Ordering Information

1120-11 XX XX M XXX C R XX A1

No. of Pins	Contact Plating	Pin Length	Insulator Material	Packing	Series No.
02-40	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=B+D+2.0+ $\frac{W}{2}$ Standard:111=11.1	C=PA9T	T=Tube P=Tube+CAP R=Tape & Reel+CAP	01~99

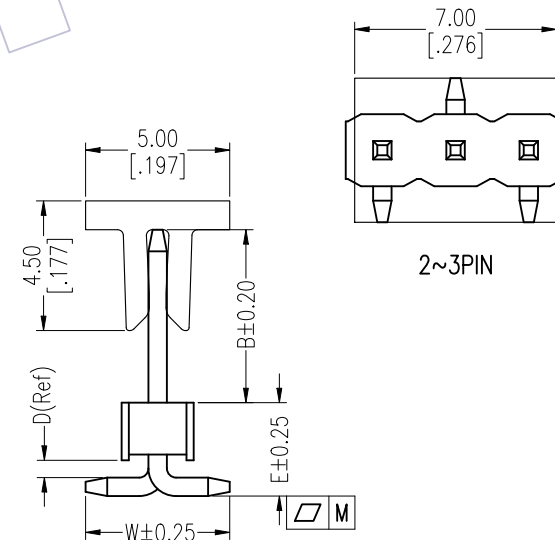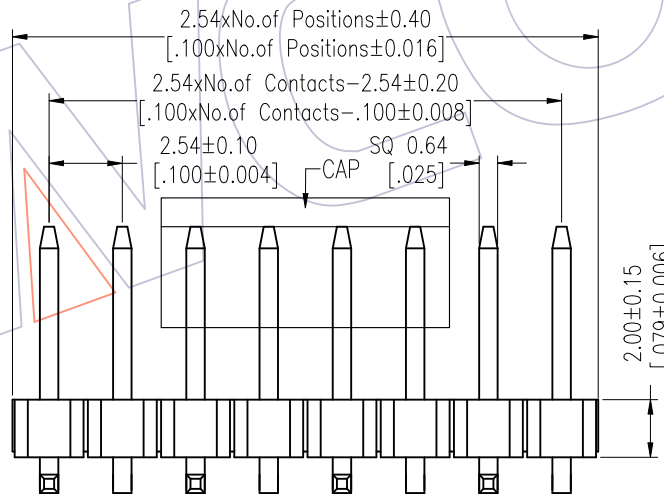

Item	Pin Length	W	E	B	Mating
Standard	11.10	5.00	3.24	6.00	2171 2185
Alternate					

PIN(PerRow)	2-15P	16-25P	26-40P
M	0.10	0.15	0.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2023/02/03	Add Flatness	△A2	DuYing	DuYing	2023/02/03	UNIT	mm	1120-11XXXXMXXRCRXX
A1	2018/01/22	Modify P/N	△A1	Ruipeng	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/05/07	NEW	-----	-----	APPROVE	DATE	SHEET	1/1	PH2.54 SINGLE ROW SMT H=2.0
							PROJ.		Customer NO.

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com  
 E-mail: salesks@wcon.com