
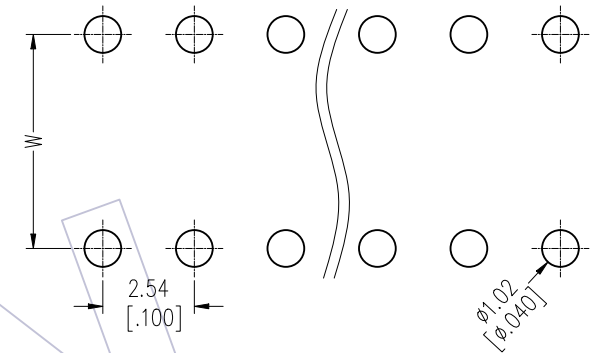


HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PBT+30%G.F UL94V-0 BK(std)
 or PA9T+30%G.F UL94V-0 BK

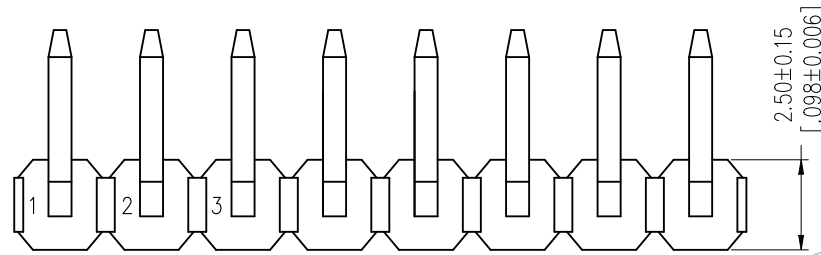

Ordering Information

1125-11 XX XX U XXX X 1

No. of Pins	Contact Plating	Pin Length	Packing
02-40	G0=Gold Flash	L=W+2A+1.86	0=PE Bag
	G3=10u"Gold	Standard:	T=Tube
	G4=15u"Gold		
	G5=30u"Gold		
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		

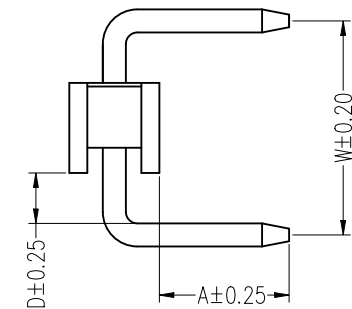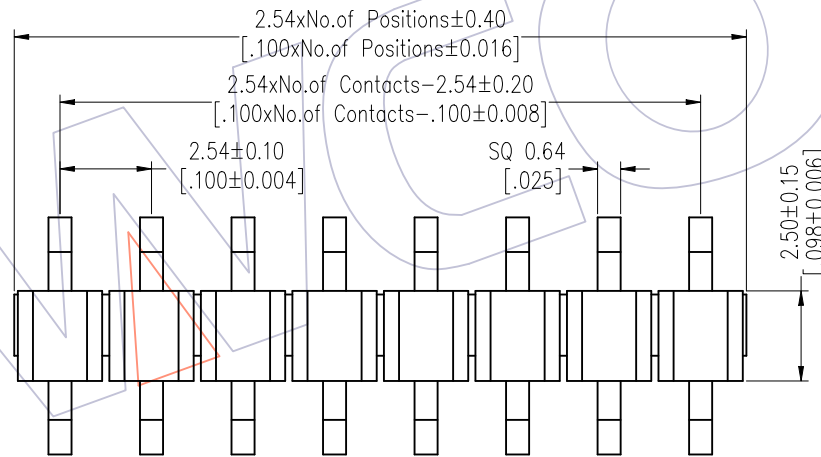

Item	Pin Length	W	A	D
Standard	---	---	---	---
Alternate				

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	William Chen	2012.05.17	UNIT mm		1125-11XXXXUXXXXX
X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE:
X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		PH2.54 SINGLE ROW H=2.5 U-TYPE
Angle ± 3°			PROJ.		Customer NO.
DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com