



HSF

NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(Au)
 -40°C to +105°C(Sn)
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

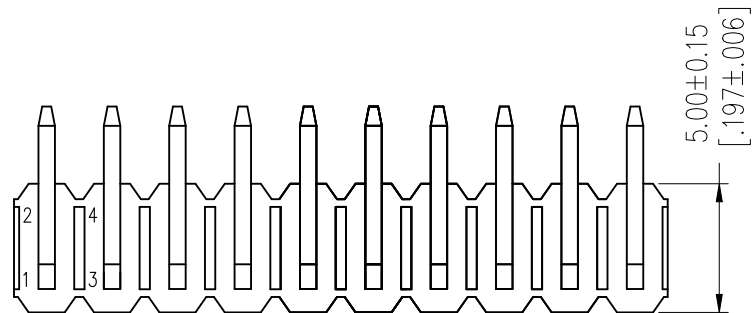

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

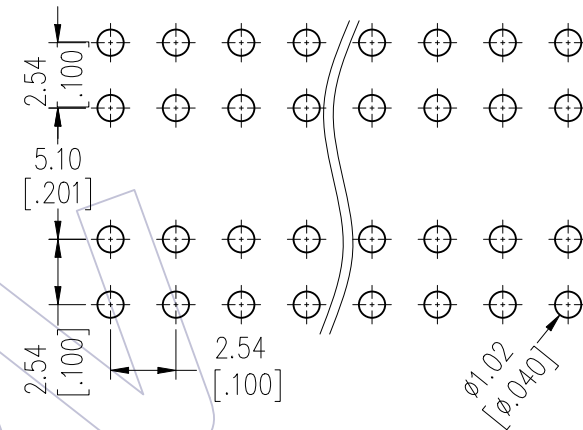



Ordering Information

1125-12 XX XX U XXX C 0 XX

No. of Pins Per Row
 Contact Plating
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin
 SM=Matte Tin

Pin Length(Short)
 L=W+2A+1.9

Packing
 0=PE Bag

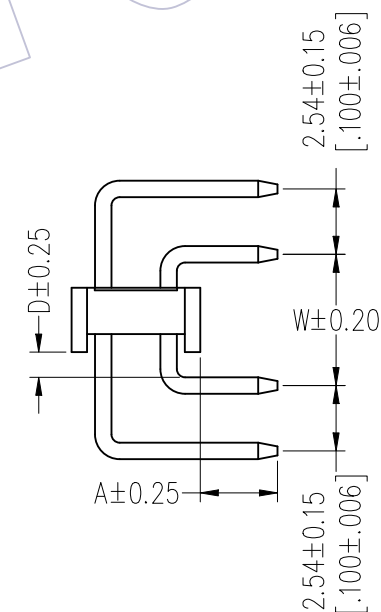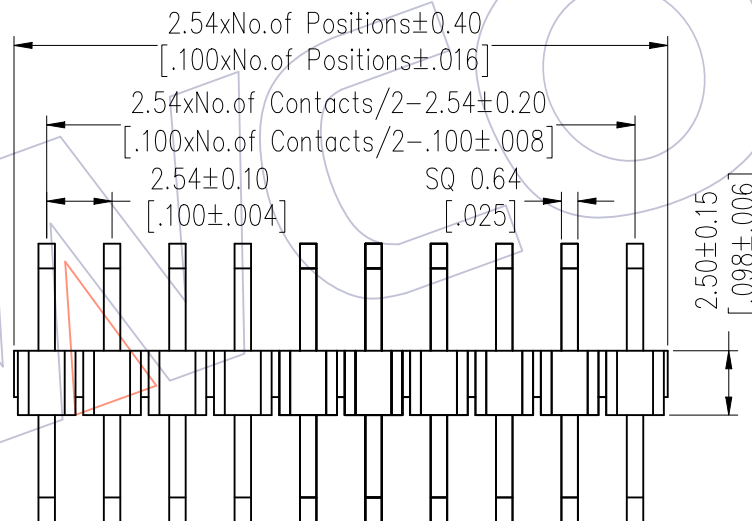

Item	Pin Length	W	A	D
Standard	130	5.10	3.00	0.98
Alternate				

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	XSR	2019/06/05	UNIT	mm [inch]	1125-12XXXXUXXXC0XX
X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.54 DUAL ROW H=2.5 U-TYPE
Angle ± 3°			PROJ.		Customer NO.
DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019/06/05	NEW	-----