





HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

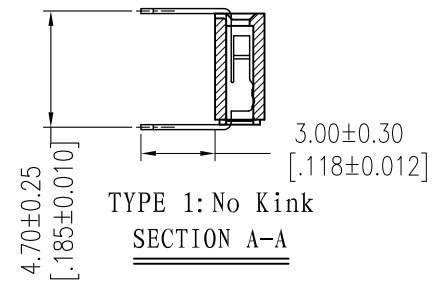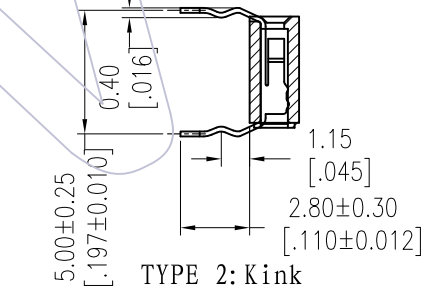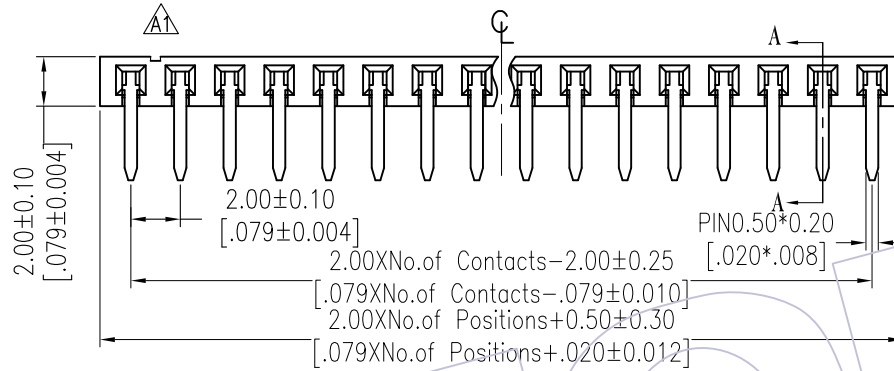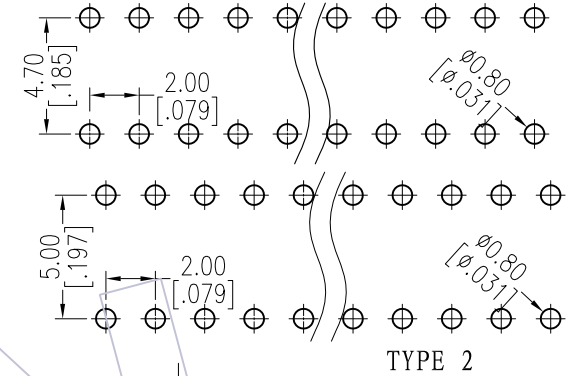

Ordering Information


2220 - 1 XX R XX CUNT X

No. of Pins per ROW: 02-40PIN

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packing:
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

Series:
 1=TYPE 1
 2=TYPE 2

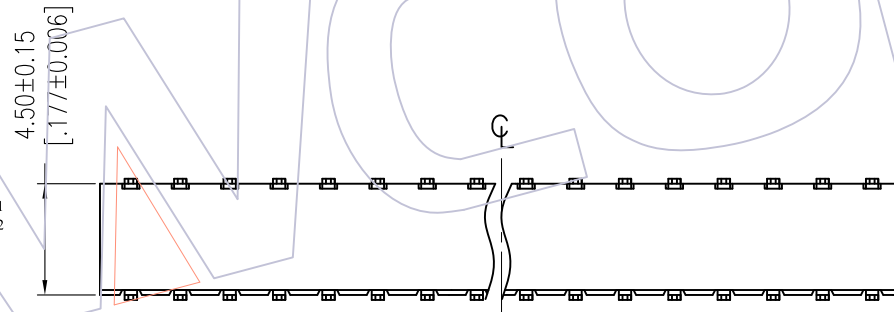

Item	Pitch	Mating
Standard	2.00	1220
Alternate		

TITLE	PART NO.
TYPE 1	2220-1XXRXXCUNT1
TYPE 2	2220-1XXRXXCUNT2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW Wang	DATE	SCALE	FIT	PART NO. 2220-1XXRXXCUNT X
				x.x	±0.40					
A1	2013/03/26	Modify Drawing	-----	x.xx	±0.25	CHECK	DATE	UNIT	mm	TITLE: FH2.00mm SINGLE ROW 90° DIP SIDE ENTER H=2.0
A0	2012/07/16	NEW	-----	x.xxx	±0.15	APPROVE	DATE	SIZE	A4	
				Angle	± 3'		DATE	SHEET	1/1	
				DIM	TOL			PROJ.	☉	Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com