
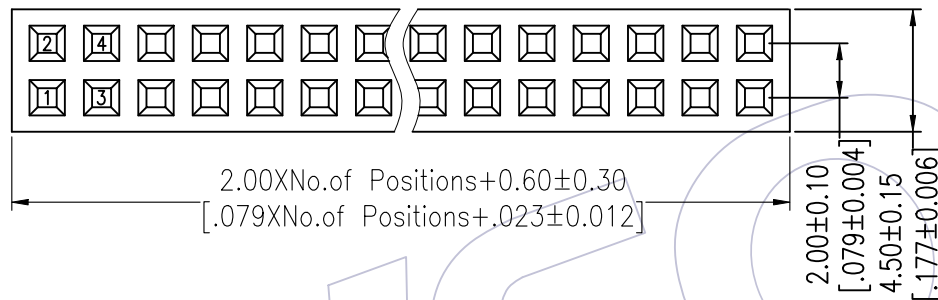


HSF

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%GF UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

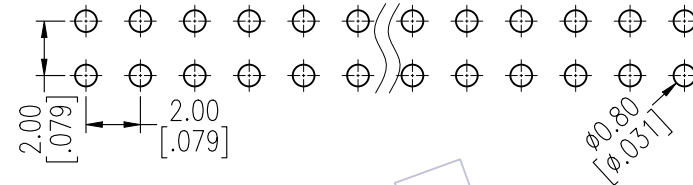

Ordering Information



2243 - 2 XX S XX CUNT 1

No. of Pins per ROW: 02-40PIN

Contact Plating:

- G0=Gold Flash
- G3=10μ"Gold
- G4=15μ"Gold
- G5=30μ"Gold
- S0=Gold Flash/Tin
- S3=10μ"Gold/Tin
- S4=15μ"Gold/Tin
- S5=30μ"Gold/Tin
- SN=Tin
- SM=Matte Tin

Packing:
T=Tube

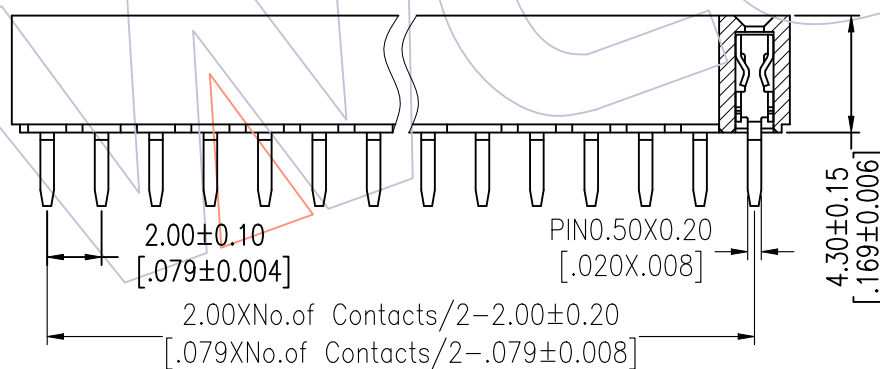

| Item | Pitch | Mating |
|-----------|-------|-----------|
| Standard | 2.00 | 1215/1220 |
| Alternate | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-----|------------|--------------------------|--------|-------------|---------|------------|-----------|-----|---|
| A0 | 2012/07/19 | NEW | ----- | x.x ±0.40 | JYHuang | 2012/07/19 | UNIT mm | | 2243-2XXSXXCUNT1 |
| | | | | x.xx ±0.25 | CHECK | DATE | SIZE A4 | | TITLE: |
| | | | | x.xxx ±0.15 | APPROVE | DATE | SHEET 1/1 | | FH2.00 DUAL ROW 180° DIP H=4.3 W=4.5 |
| | | | | Angle ± 3' | | | PROJ. | | Customer NO. |
| | | | | DIM TOL | | | | | |

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com