





HSF

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+33%G.F UL94V-0

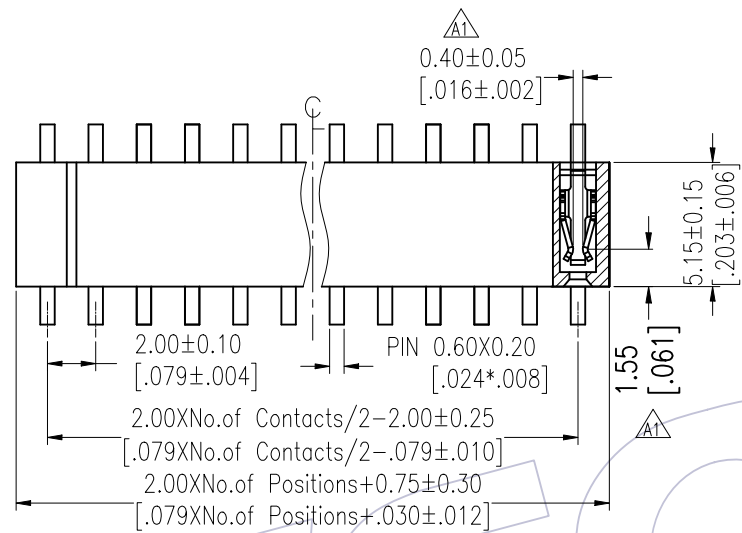

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

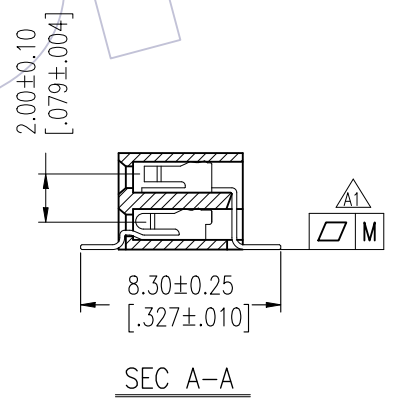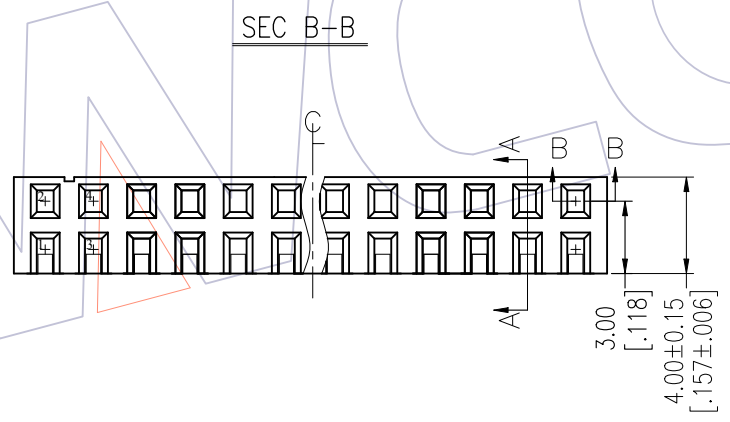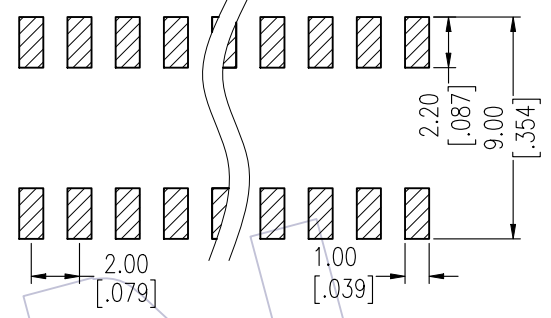

Ordering Information

2250 - 2 XX M XX CUN X 1

- No. of Pins per ROW: 02-40PIN
- Contact Plating:
 - G0=Gold Flash
 - G3=10μ"Gold
 - G4=15μ"Gold
 - G5=30μ"Gold
 - S0=Gold Flash/Tin
 - S3=10μ"Gold/Tin
 - S4=15μ"Gold/Tin
 - S5=30μ"Gold/Tin
 - SN=Tin
 - SM=Matte Tin
- Packing:
 - T=Tube
 - R=Tube&Reel+CAP

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

Pin(Per Row)	2-15P	16-25P	26-40P
M	0.10	0.15	0.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	XSR	2023/02/14	UNIT	mm	2250-2XXMXXCUNX1
A1	2023/02/14	Modify Flatness	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.0mm Female Header DUAL ROW 180° SMT SIDE INSERT H=4.00
A0	2012/07/13	NEW	-----	X.XXX ±0.15			SHEET	1/1	Customer NO.
				Angle ± 3°	APPROVE	DATE	PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com