


HSF

NOTES:

Current Rating: 3.0AMP
 Withstand Voltage: 500V AC
 Contact Resistance: 20mΩ, Max
 Insulation Resistance: 1000MΩ, Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze $\Delta 1$
 Contact plating: Au or Sn over Ni
 Insulator Material: PA9T+33%G.F UL94V-0

Recommended P.C.B Layout(TOP Side)
 (PCB BOARD TOLERANCE ± 0.05)

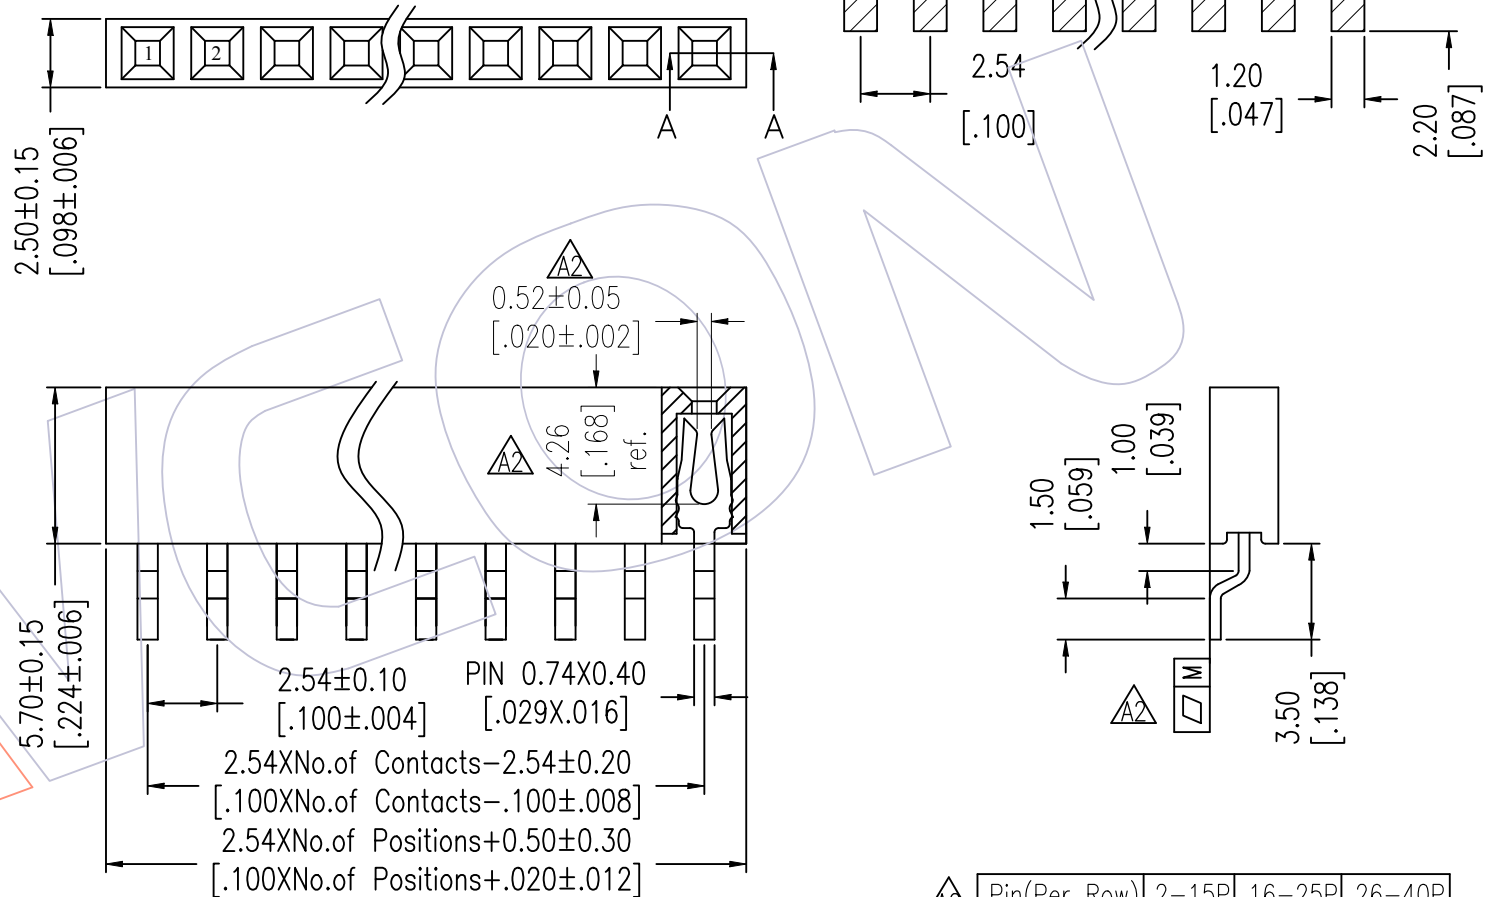

Ordering Information

2157 - 1 XX Z XX C Y N T 1

- No. of Pins per ROW: 02-40PIN
- Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, S0=Gold Flash/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin, SM=Matte Tin
- Insulator: PA9T
- Packing: T=Tube

SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2023/02/07	Modify Flatness	—	X.X ±0.40	XSR	2023/02/07	UNIT	mm inch	2157-1XXZXXCYNT1
A1	2014/05/08	Modify drawing	—	X.XX ±0.25	CHECK	DATE	SIZE	A4	
A0	2012/09/11	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	TITLE: 2.54mm Female Header SINGLE 90°SMT H=5.7
				Angle ± 3° DIM TOL			PROJ.	Customer NO.	



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--