

# HSF


NOTES:  
 Current Rating: 3.0AMP  
 Contact Resistance: 30mΩ max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ  
 Operation Temperature: -55℃~+105℃

Contact Material: Brass  
 Contact Plating: Au and Sn over Ni  
 Fixing Material: Phosphor Bronze  
 Fixing Plating: Sn over Ni  
 Insulation Material: PA9T+33% G.F(UL94V-0)

## Ordering Information

3410-2 XX X MM SX N A X

No. of Pins Per Row: 10pin, 16pin, 32pin  
 Rows with Contacts: B=a+b, D=a  
 Contact Plating: S0=Gold Flash/Tin, S1=3u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin  
 Packing: A=Tray  
 N=Without Lock, W=With Lock

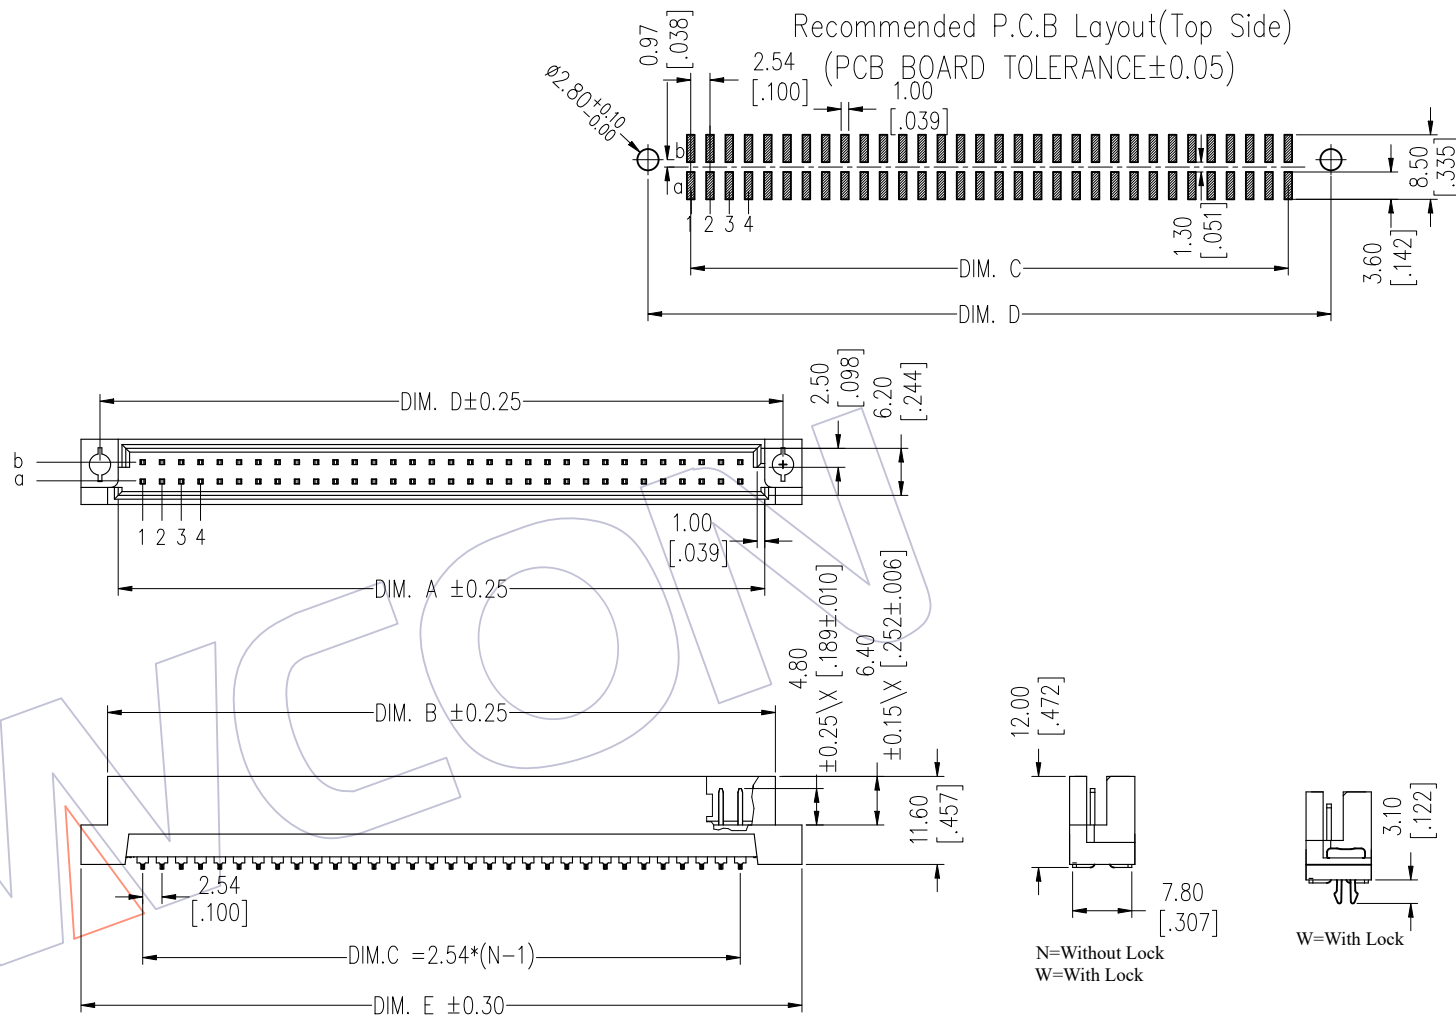

32	0.20MAX
16	0.15MAX
10	0.12MAX
PIN	

Q	64	2	32	85.20	88.00	78.74	90.00	95.00
Q/2	32	2	16	44.60	47.40	38.10	50.00	55.00
Q/3	20	2	10	29.30	32.10	22.86	34.76	39.76
TYPE	POS.	ROWS	N	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

				OPERATION		DRAW XSR	DATE 2019/11/02	SCALE UNIT	FIT mm inch	PART NO. 3410-2XXXMMSXXAX
A1	2019/11/02		Material: PBT TO PA9T	X.X	±0.40					
				X.XX	±0.25	CHECK	DATE	SIZE A4	TITLE: 2.54PITCH DIN 41612 Male SMT(Q-Type)	Customer NO.
A0	2016/09/22		NEW	X.XXX	±0.15	APPROVE	DATE	SHEET 1/1		
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	Angle DIM	± 3' TOL		PROJ.		

**WCON**  
 Http: www.wcon.com

WCON-Dongguan      WCON-Kunshan  
 Tel: +86 769 85358920      Tel: +86 512 57468408  
 Fax: +86 769 85358915      Fax: +86 512 57468468  
 E-mail: sales@wcon.com      E-mail: salesks@wcon.com