

HSF

NOTES:



Rated Current:3.0AMP
 Rated Voltage:250V AC/DC
 Contact Resistance:30mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃

Housing Material:PA66 UL94V-0

Ordering Information

WF2005-2H XX W 0 1

No. of Pins per Row:3-20P
 Color: W=White
 Packing: 0=PE Bag

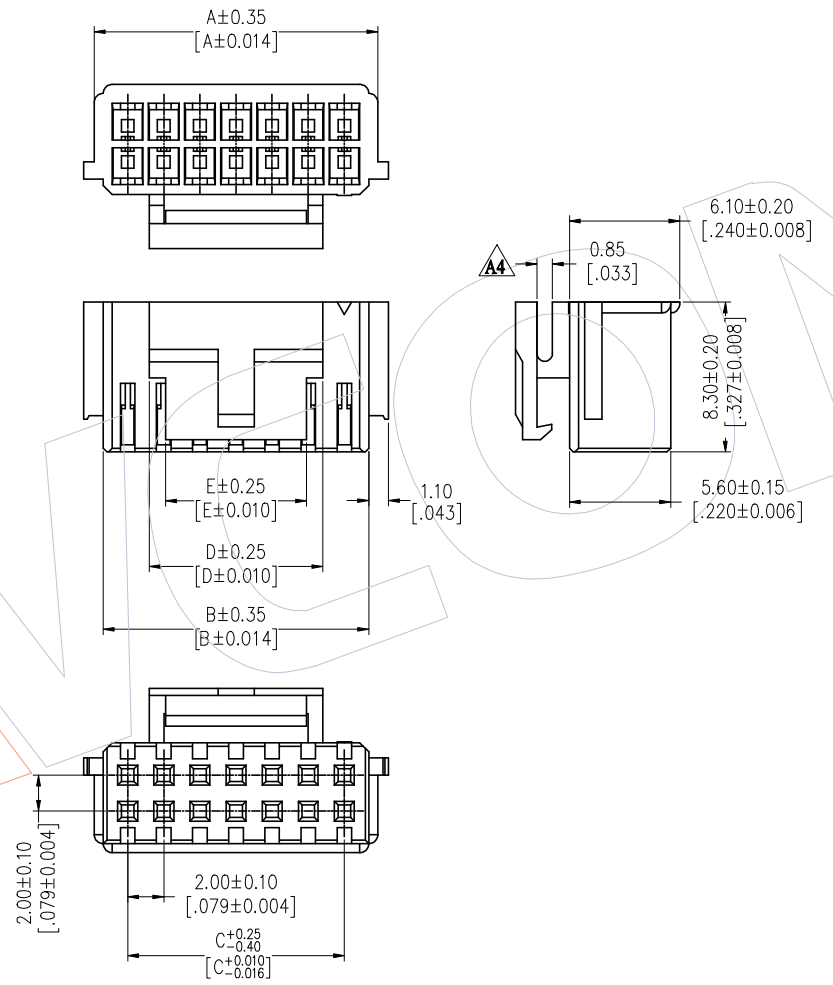

Pins	DIM				
	A	B	C	D	E
A3 2*3P	7.70	6.70	4.00	3.70	2.00
2*4P	9.70	8.70	6.00		
A1 2*5P	11.70	10.70	8.00	9.60	7.80
B0 A2 2*6P	13.70	12.70	10.00		
2*7P	15.70	14.70	12.00		
2*8P	17.70	16.70	14.00		
2*9P	19.70	18.70	16.00		
2*10P	21.70	20.70	18.00		
2*11P	23.70	22.70	20.00		
2*12P	25.70	24.70	22.00		
2*13P	27.70	26.70	24.00		
2*14P	29.70	28.70	26.00		
2*15P	31.70	30.70	28.00		
2*16P	33.70	32.70	30.00		
2*17P	35.70	34.70	32.00		
2*18P	37.70	36.70	34.00		
2*19P	39.70	38.70	36.00		
2*20P	41.70	40.70	38.00		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
B0	2021.08.07	Modify	—			OPERATION	ZHLL	2021.05.10			WF2005-2HXXW01
A4	2021.05.10	Modify	—		±0.40	CHECK			UNIT	mm	TITLE: 2.00mm Pitch WTB Housing
A3	2019.07.22	Add 2*3P	—		±0.25				SIZE	A4	
A0	2012.12.06	NEW	—		±0.15	APPROVE			SHEET	1/1	
					± 3'				PROJ.	⌀	Customer NO.

WCON
 Http: www.wcon.com
 WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com