

HSF

TECHNICAL SPECS:



Current Rating: 1.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000V_{RMS}
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Connecting Pin: ∅0.41mm
 Insulator Material: PPS+30%G.F(UL94V-0)



Ordering Information

3515-192 XX R XX 103 X 1

No. of Pin 2-50PIN	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold	Packing A=Tray T=Tube
-----------------------	---	-----------------------------

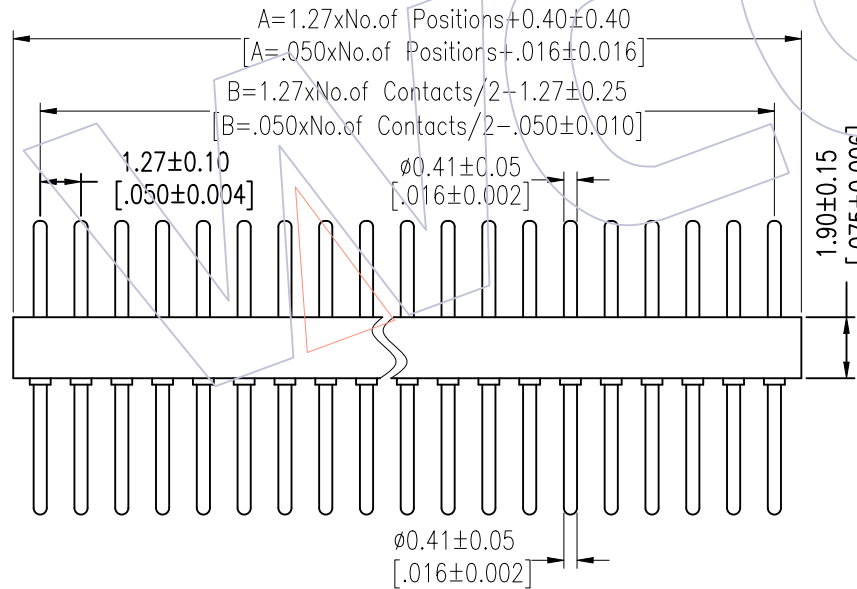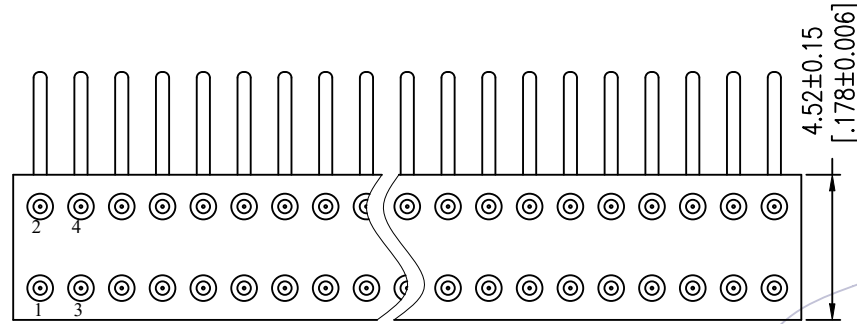

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

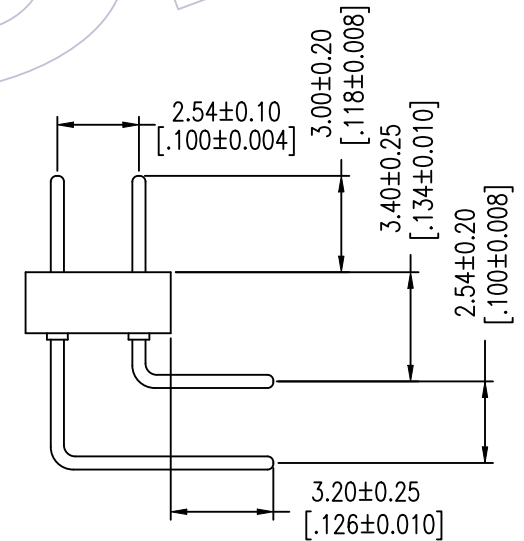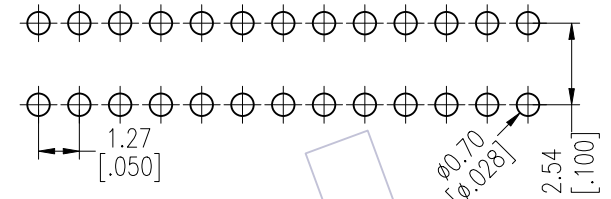

Item	Pitch	Mating
Standard	1.27X2.54	3525
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/10/22	NEW	-----	x.xx ±0.40	JYHuang	2012/10/22	UNIT	mm	3515-192XXRXX103X1
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	1.27x2.54mm MACHINED PIN HEADER DUAL ROW 90° H=1.90 L=10.3
				Angle ± 3'			PROJ.	⊕	Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--