



No: 1

产品装入真空管内
SG-B104(600*21.5*26.8mm)




No: 2

塞塑胶塞




No: 3

9管为一扎
用PE膜固定每扎真空管两端及中间,
包住两端利角,以防划破胶袋




No: 4

将3扎包扎好的真空管装入真空袋,
外加2包干燥剂,机台抽真空
PE-20A规格: 35*95cm




产品摆放示意图

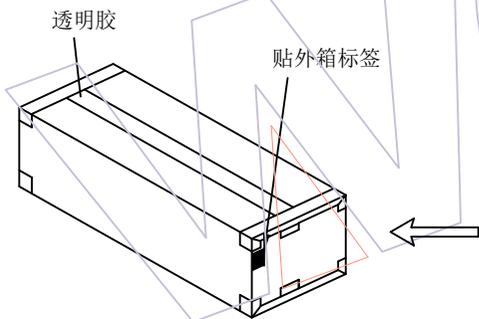


No: 7

封箱及贴标签于外箱侧面的左上角



No: 6

内箱放入外箱(2内箱/外箱)
外箱规格:CTN-10C(双坑 65*33*19CM)



No: 5

将抽真空的产品,放入内箱
(3扎/内箱)封箱
内箱规格:CTN-10A(63*15*17CM)

2.54mm DFCN 双排公座90度DIP(反向型)

2*PIN	产品长度	真空管装数量	每内箱装数量	每外箱装数量
8	28.84	20	540	1080
16	39.00	14	378	756
24	49.16	11	297	594
32	59.32	9	243	486
40	69.48	8	216	432
48	79.64	7	189	378
56	89.80	6	162	324
64	99.96	5	135	270

说明:

1. 产品如图所示型态放入真空管
2. 注意各标签样式. 位置及方向的一致性
3. 当订单数量不足一内箱数量时, 内箱可充当外箱使用, 并贴标签

变更 记 事						零件图	颜色	SCALE	FIT	 WCON ELECTRONICS (GUANGDONG) CO. LTD 料号 PART NO. 6340-2XXMRESXMWT01 品名 TITLE: 2.54mm DFCN Conn. R/A Male (Reverse) 2*XXP W/T Lock&Nut DIP=3.0 管装规范	
						X.	COLOR	UNIT	mm		
						X.X	±0.20	MATERIAL	SIZE		A4
						X.XX	±0.10	DESING	SHEET		1/1
						X.XXX	±0.05	审核	PROJ.		核准
A0	2023/03/21	NEW			Angle	± 2'	核准				
版次 REV	日期 DATE	变更说明 MODIFICATION DESCRIPTION	变更 CHANGE	核准 APPROVE	DIM	TOL	CHECK APPROVE				