

HSF

NOTES:
 Current Rating:1AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni
 Insulator Material:PBT+30%GF(UL94V-0)


Ordering Information

6310 - 050 S S SX M N A 01

No.of Pins
50Pin

Contact Plating
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Packing
A=Tray

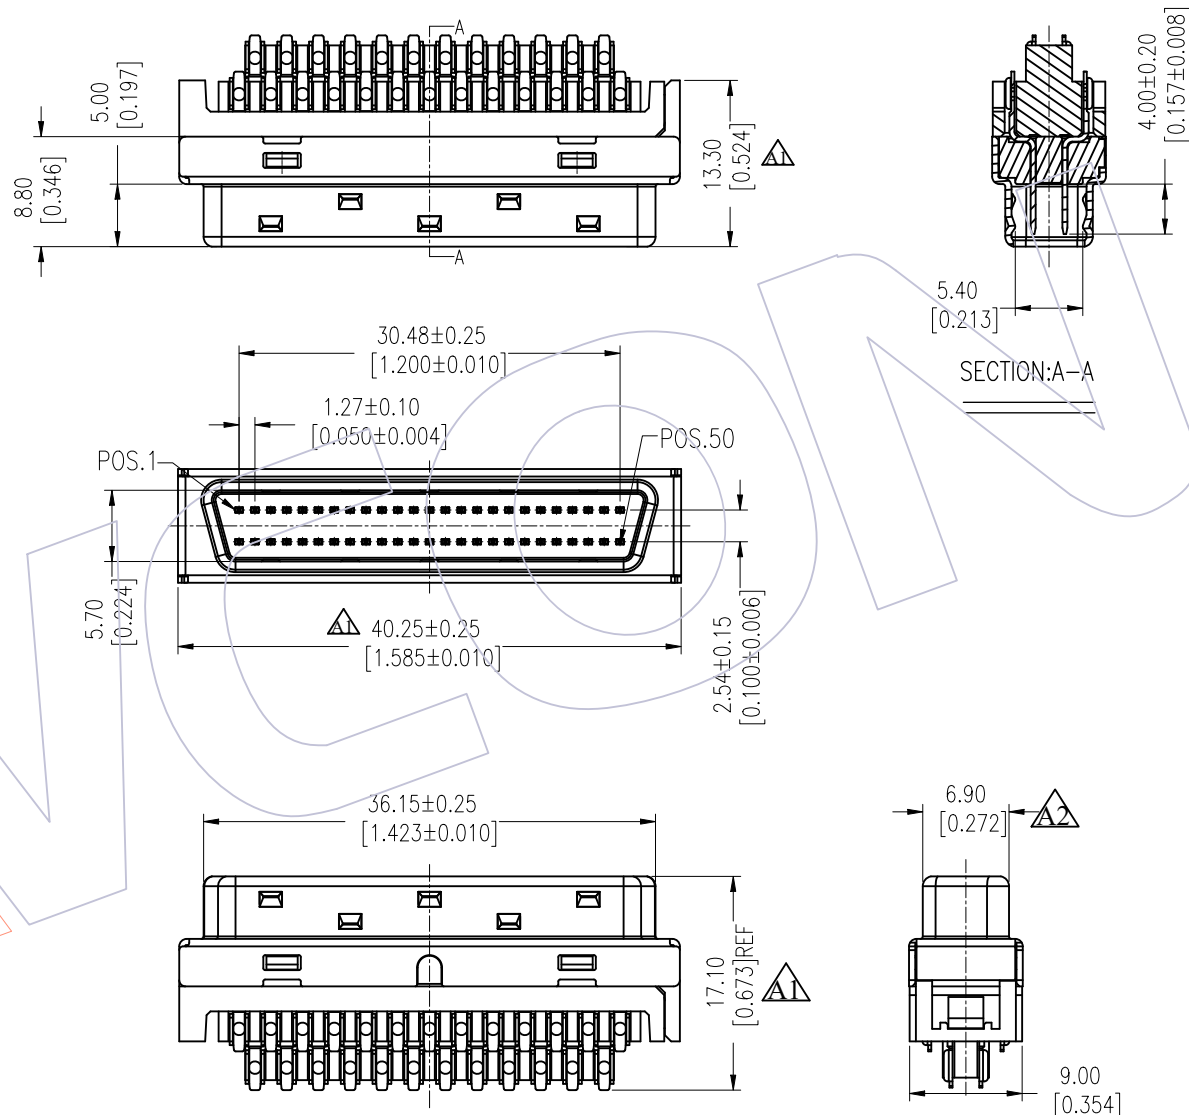

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2013/01/26	Modify The Dimension 7.00 → 6.90	—	X.X ±0.40	Tsingsn	2013/01/26	UNIT mm	mm	6310-050SSSXMA01
A1	2012/04/19	MODIFY	—	X.XX ±0.25	CHECK	DATE	inch	inch	
A0	2012/03/19	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET 1/1	A4	TITLE: 1.27x2.54 SCSI 50P Male Soldering Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3° DIM TOL	APPROVE	DATE	PROJ.	Customer NO.	Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com