

HSF


NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-25°C to +85°C


Insulator Material:PBT UL94V-0
 Use with:3220-T
 Mated with:3220-Ejector Header

Ordering Information

3220 - H XX B 0 1

No.of Pins Colour Packing
 06-60P B= Black 0= PE Bag

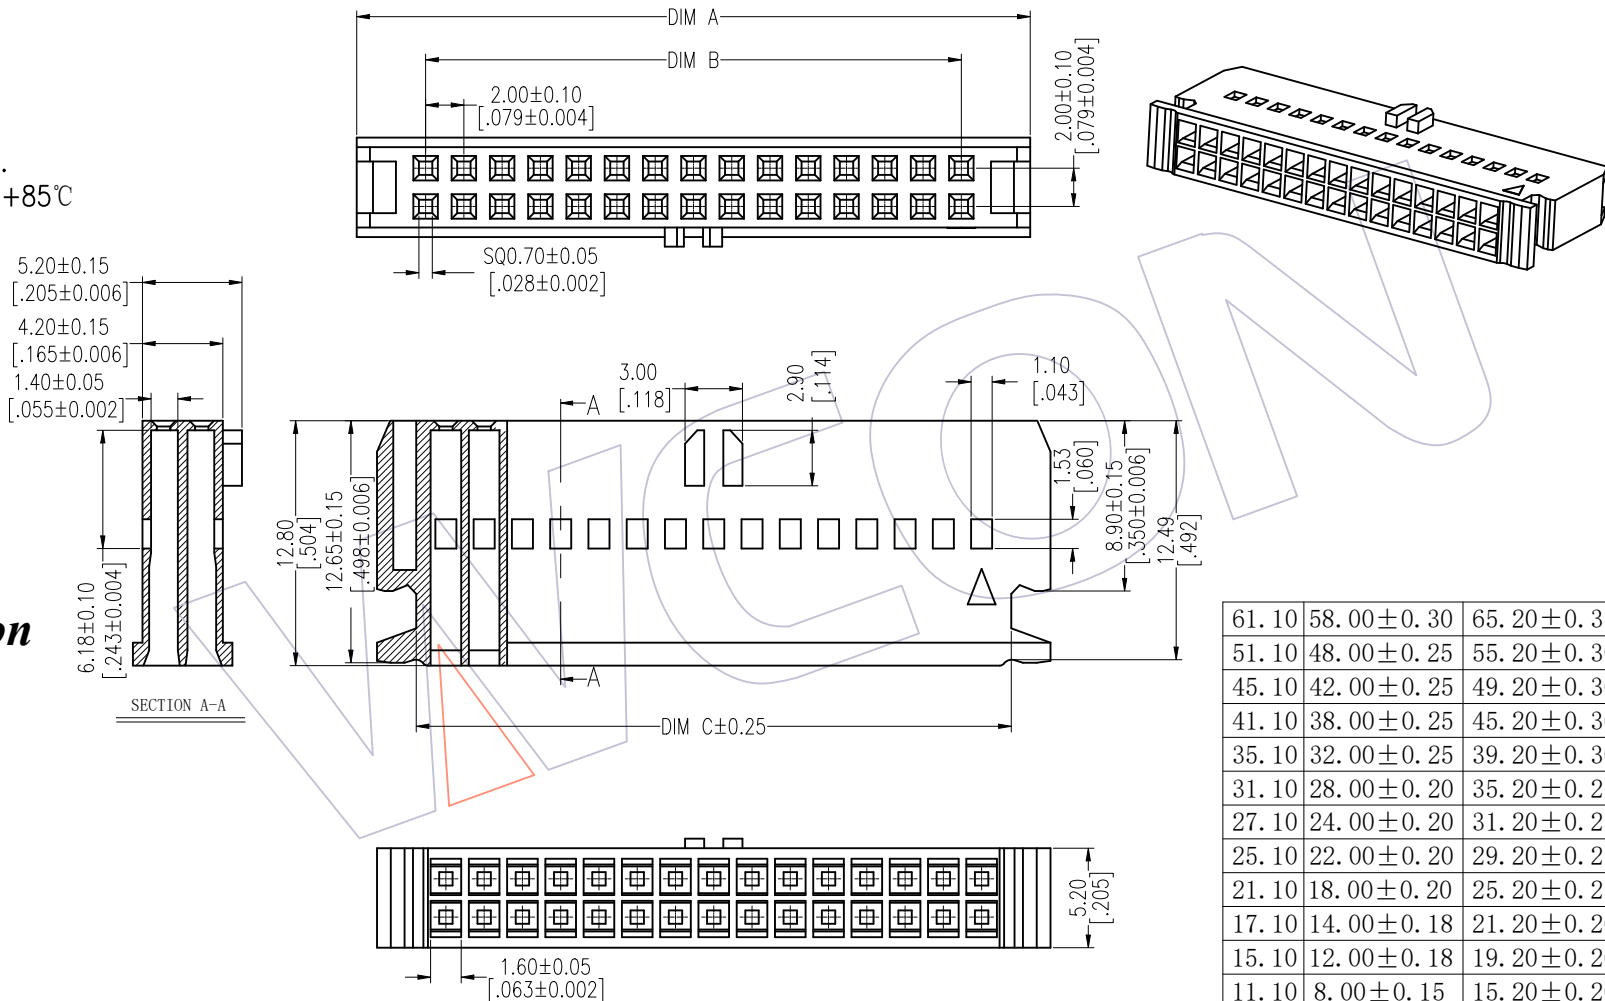

				OPERATION		DRAW		DATE		SCALE		FIT		PART NO.		 Http: www.wcon.com WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: salesks@wcon.com	
				X.X ±0.40		Ding		2017/02/10		UNIT		mm		3220-HXXB01			
				X.XX ±0.25		CHECK		DATE		SIZE		A4		TITLE:			
				X.XXX ±0.15		APPROVE		DATE		SHEET		1/1		2.0mm HOUSING H=12.8			
AO	2017/02/10	NEW		Angle ± 3'						PROJ.		Customer NO.					
REV	DATE	MODIFICATION DESCRIPTION		DIM TOL		CHANGE											