
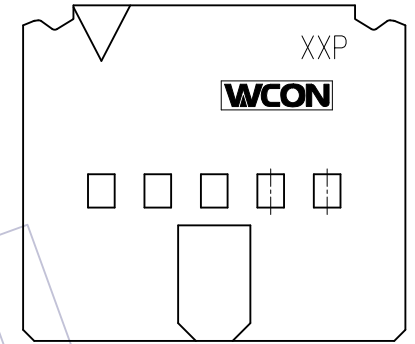


HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Rated Voltage: 250V
 Withstand Voltage: 1000V AC/DC \triangle
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Insulator Material: PBT+30%G.F UL94V-0
 Mated with: 3210 Series
 Used with: 3210-T

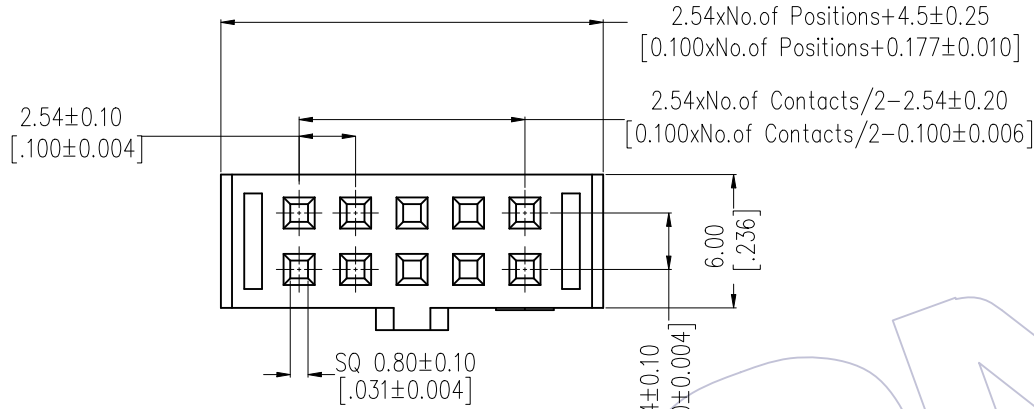


W/T Logo \triangle

Ordering Information

3210 - H XX B 01

Housing No. of pins Color
 10P~50P B=Black

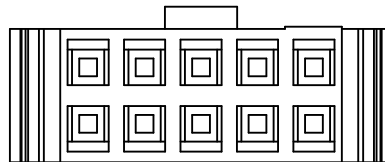

Type	PART NO
W/O Logo	3210-HXXB01
W/T Logo \triangle	3210-HXXB01W

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SCALE	FIT	PART NO.
A4	2022/06/02	Add.new.Mold	Li K	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	3210-HXXB01
A3	2020/03/25	Add "WCON" Logo \triangle	Du Ying	x.X ±0.40	Du Ying	2020/03/25	UNIT	mm	TITLE:	
A2	2017/05/19	Modify \triangle	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	2.54mm"r" TYPE HOUSING H=15.10	
A0	2012/10/08	NEW	Ding	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SCALE	FIT	PART NO.

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com