


# HSF

**NOTES:**

Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Sn Over Ni  
 Insulator Material: PA46+30%G.F UL94V-0


Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

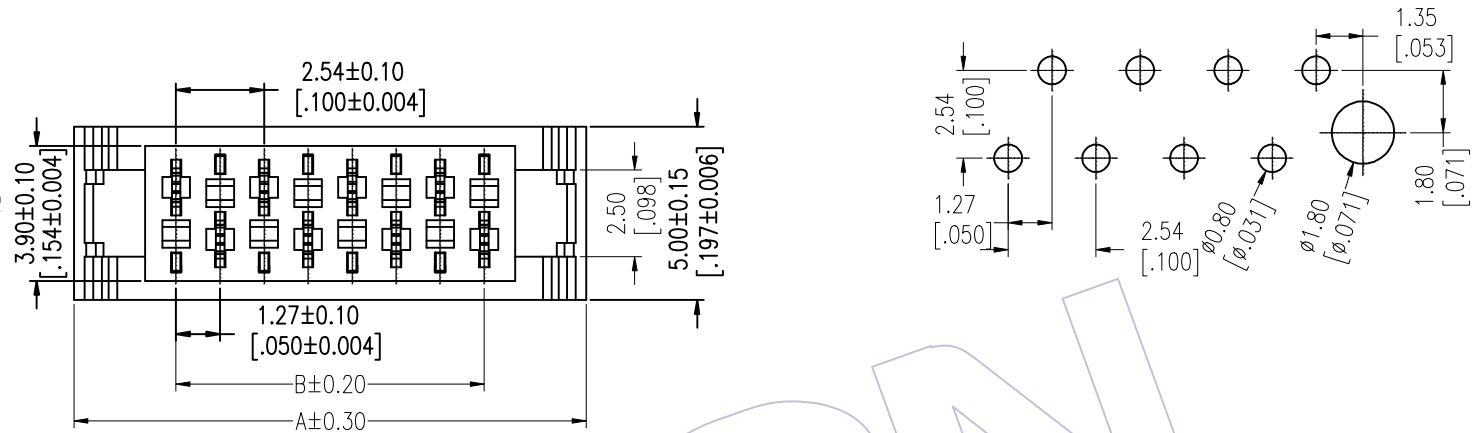

## Ordering Information

3900-XX FS SN E W T 01

No. of Pins: 04P 12P, 06P 14P, 08P 16P, 10P 18P, 20P  
 Contact Plating: SN=Tin  
 Insulator Material: E=PA46  
 Packing: T=Tube

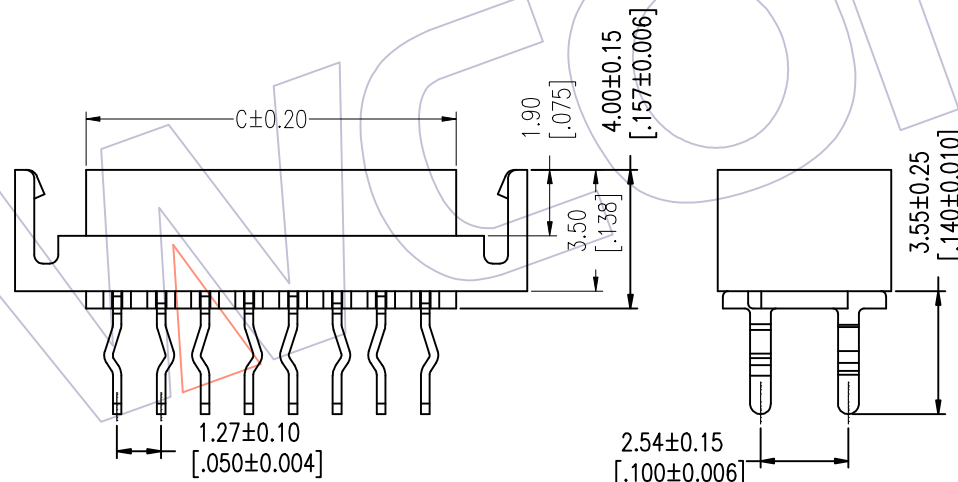

Circuit	Part No.	Dimension			Q'ty /Tube
		A	B	C	
04	3900-04FSSNEWT01	9.70	3.81	5.60	59
06	3900-06FSSNEWT01	12.24	6.35	8.14	47
08	3900-08FSSNEWT01	14.78	8.89	10.68	39
10	3900-10FSSNEWT01	17.32	11.43	13.22	33
12	3900-12FSSNEWT01	19.86	13.97	15.76	29
14	3900-14FSSNEWT01	22.40	16.51	18.30	25
16	3900-16FSSNEWT01	24.94	19.05	20.84	23
18	3900-18FSSNEWT01	27.48	21.59	23.38	21
20	3900-20FSSNEWT01	30.02	24.13	25.92	19
22	3900-22FSSNEWT01	32.56	26.67	28.46	17
24	3900-24FSSNEWT01	35.10	29.21	31.00	16
26	3900-26FSSNEWT01	37.64	31.75	33.54	15

A4	2022/01/24	Add 22,24,26PIN	△	DuYing	OPERATION	DRAW	DATE	SCALE	FIT	PART NO. SEE TAB
A3	2018/05/15	MINI MATCH--1.27mm MRC Connector	△	Ding	x.x ±0.40	DuYing	2022/01/24	UNIT	mm	
A2	2014/05/28	Micro Match ---Mini Match	△	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27mm MRC Connector Socket △△ 180° DIP With Latch
A0	2012/10/11	NEW	-----	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.	◆	Customer NO.

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com