


# HSF

**NOTES:**

Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C


Contact Material: Phosphor Bronze  
 Contact plating: Sn over Ni  
 Insulator Material: PBT+15%G.F UL94V-0

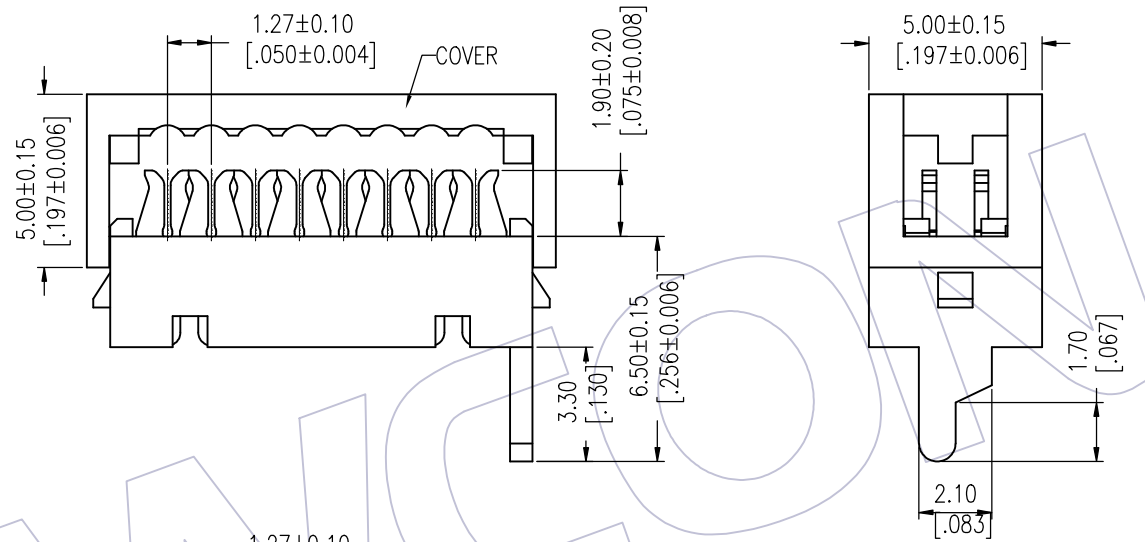

## Ordering Information

3900-XX MI SN ANT 02

No. of Pins	Contact Plating	Packing
04P 12P	SN= Tin	T= Tube
06P 14P		
08P 16P		
10P 18P		
12P 20P		

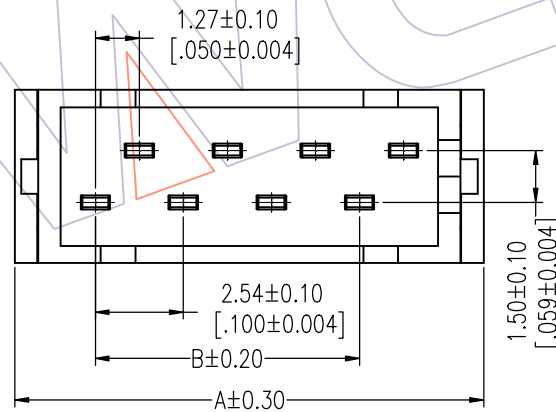

Dimension & Ordering Information

Circuit	Part No.	Dimension		Q'ty /Tube
		A	B	
04	3900-04MISNANT02	8.45	2.54	68pcs
06	3900-06MISNANT02	10.99	5.08	52pcs
08	3900-08MISNANT02	13.53	7.62	42pcs
10	3900-10MISNANT02	16.07	10.16	36pcs
12	3900-12MISNANT02	18.61	12.70	31pcs
14	3900-14MISNANT02	21.15	15.24	27pcs
16	3900-16MISNANT02	23.69	17.78	24pcs
18	3900-18MISNANT02	26.23	20.32	22pcs
20	3900-20MISNANT02	28.77	22.86	20pcs
22	3900-22MISNANT02	31.31	25.40	18pcs
24	3900-24MISNANT02	33.85	27.94	17pcs
26	3900-26MISNANT02	36.39	30.48	15pcs

A3	2022/01/21	Add 22,24,26PIN	△3	DuYing	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2018/05/15	MINI MATCH--1.27mm MRC Connector	△1	Ding	x.x ±0.40	DuYing	2022/01/21	UNIT	mm	SEE TABLE
A1	2014/05/28	Micro Match --Mini Match	△1	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/10/12	NEW	-----	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	1.27mm MRC Connector Box Header
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.	Φ	Customer NO.

**WCON**  
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--