




HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

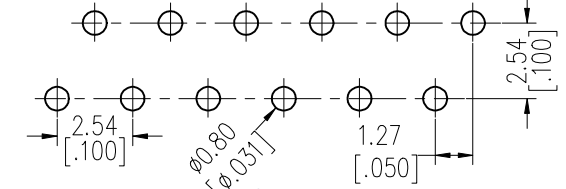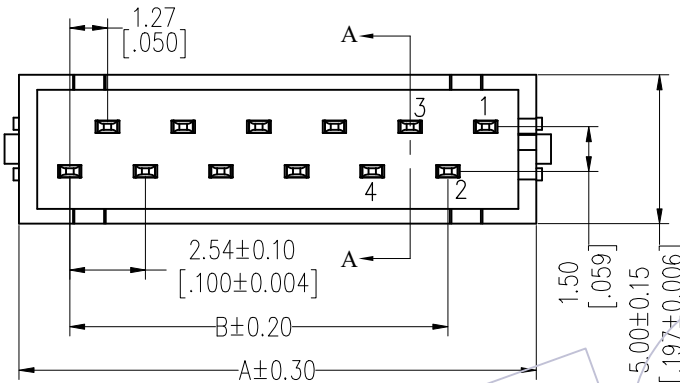


Ordering Information

3900 -XX MS SN AN T 01

No. of pins
 04P 12P
 06P 14P
 08P 16P
 10P 18P
 20P

Contact Plating
 SN=Tin

Packing
 T=Tube

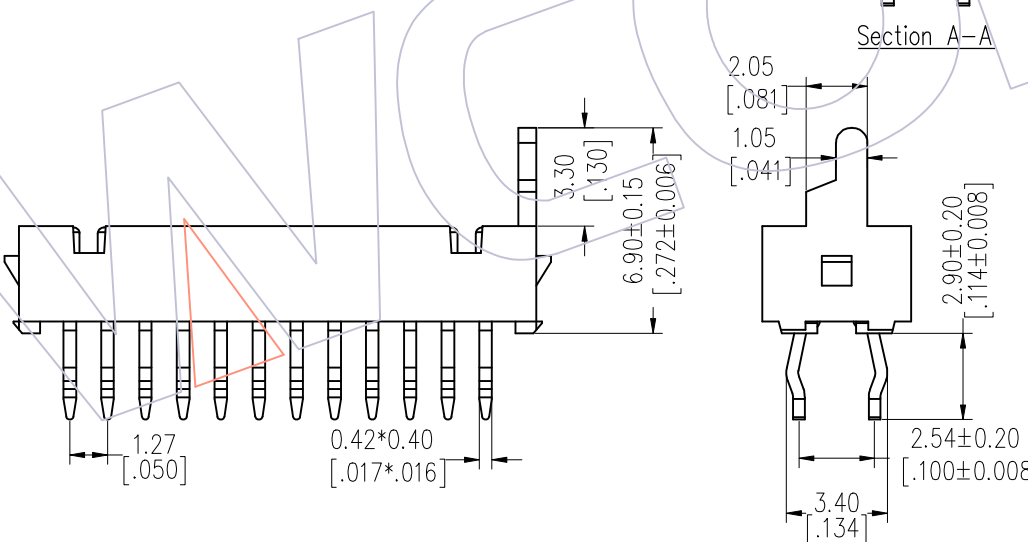

Dimensional & Ordering Information

Circuit	Part No.	Dimension		Q'TY /Tube
		A	B	
04	3900-04MSSNANT01	7.20	2.54	71pcs
06	3900-06MSSNANT01	9.74	5.08	54pcs
08	3900-08MSSNANT01	12.28	7.62	44pcs
10	3900-10MSSNANT01	14.82	10.16	37pcs
12	3900-12MSSNANT01	17.36	12.70	31pcs
14	3900-14MSSNANT01	19.90	15.24	28pcs
16	3900-16MSSNANT01	22.44	17.78	25pcs
18	3900-18MSSNANT01	24.98	20.32	22pcs
20	3900-20MSSNANT01	27.52	22.86	20pcs
22	3900-22MSSNANT01	30.06	25.40	18pcs
24	3900-24MSSNANT01	32.60	27.94	17pcs
26	3900-26MSSNANT01	35.14	30.48	15pcs

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	PART NO.	FIT	SCALE	TITLE:
A4	2022/01/21	Add 22,24,26PIN	DuYing			OPERATION	2022/01/21		SEE TABLE		mm	1.27mm MRC Connector Box Header
A3	2018/05/15	MINI MATCH--1.27mm MRC Connector	Ding	x.x	±0.40	DRAW						180° DIP
A2	2014/05/28	Micro Match --Mini Match	-----	x.xx	±0.25	CHECK						
A0	2012/10/12	NEW	-----	x.xxx	±0.15	APPROVE						
				Angle	± 3'							
				DIM	TOL				Customer NO.			

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com