



HSF

NOTES:

Current Rating: 1.2AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

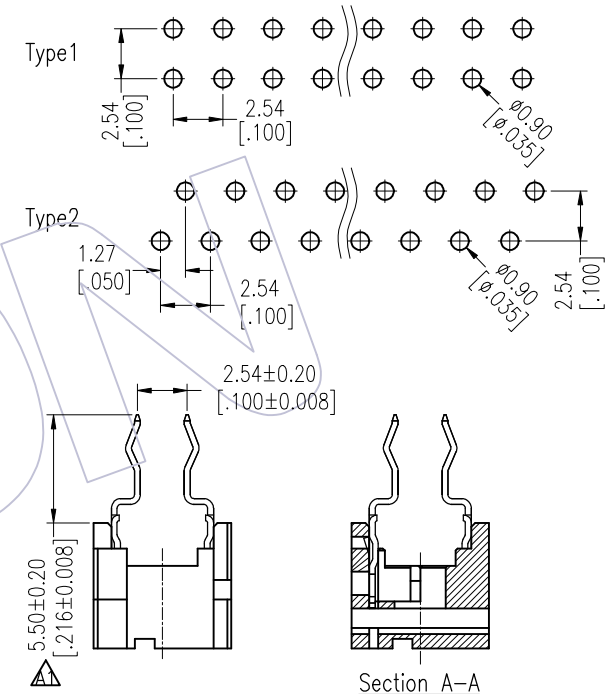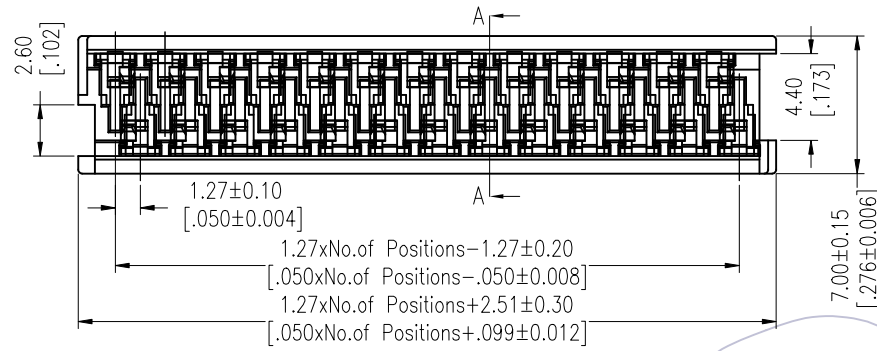


Ordering Information

3901-XX FD XX A N W X X

No. of Pins	Contact Plating	Insulator Color	Packing
04 16	SM=Matte Tin	A=PBT W=White	T=Tube
06 18	SN=Tin		A=Tray
08 20			
10 22			
12 24			
14 26			

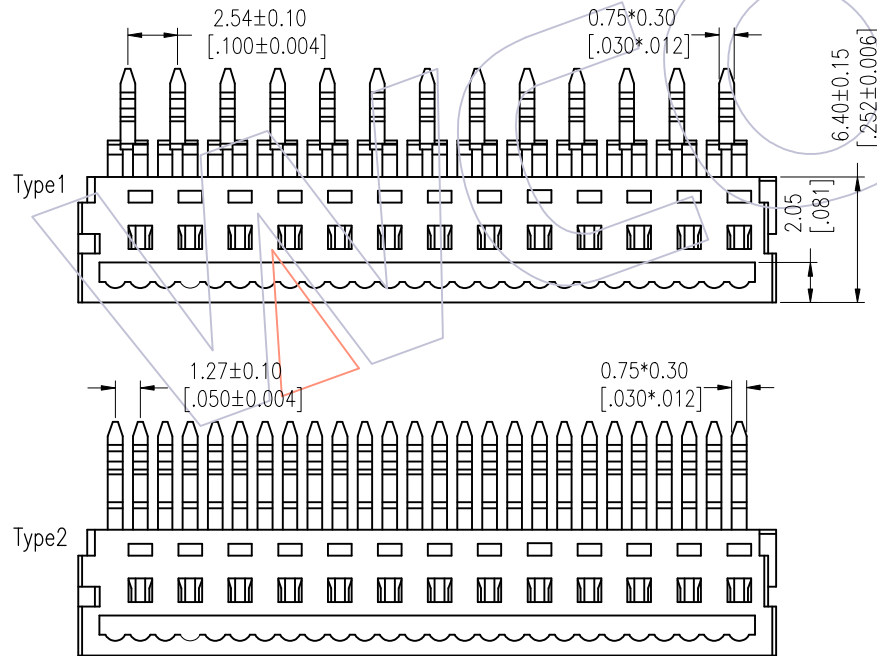

Type	PART NO.
Type1	3901-XXFDXXANWX1
Type2	3901-XXFDXXANWX2



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2018/05/15	Picoflex Connector--1.27mm SPC Connector	-----	x.X ±0.40	Ding	2018/05/15	UNIT	mm	3901-XXFDXXANWXX
A1	2017/08/04	Modify	-----	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27mm SPC Connector DIP
A0	2012/10/22	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com