
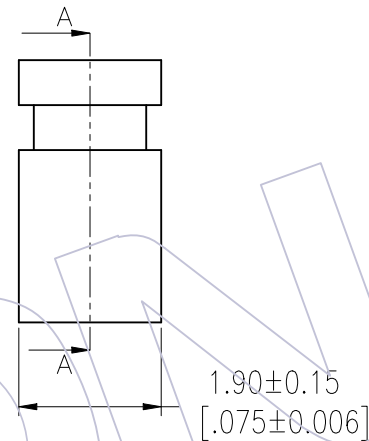


HSF

NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PBT+30%G.F UL94V-0

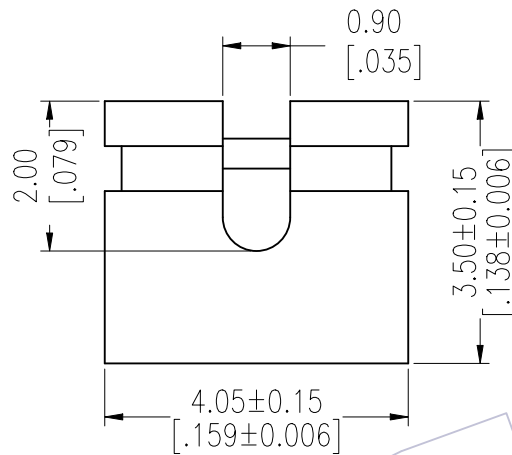



Ordering Information

3711-35 01 O XX X 0 1

Housing shape
O=Open

Contact Plating
S0=Gold Flash/Ni

Colour
B=Black (Std)
R=Red
U=Blue
N=Green
Y=Yellow



2.00 ± 0.20
[0.079 ± 0.008]

Section A-A

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	JYHuang	2012/12/10	UNIT	mm	3711-35010XXX01
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	2.00mm Mini Jumper H=3.5 Open Type
A0	2012/12/10	NEW	-----	Angle ± 3'			PROJ.	⌀	Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com