

HSF

IDC HOUSING MATERIAL:

Insulation Material: PBT+30%G.F.(UL94V-0)
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn over Ni



SPECIFICATIONS

Insulation Resistance: 5MΩ Min
 Contact Resistance: 1.0Ω Max
 Withstand Voltage: DC 300V, 10S
 The Cable Assembly Must 100% Test

CABLE MATERIAL

Insulation: UL 2651, Grey Red Side
 Conductor: 28AWG(7/0.12mm)
 Electrical: 300V

Ordering Information

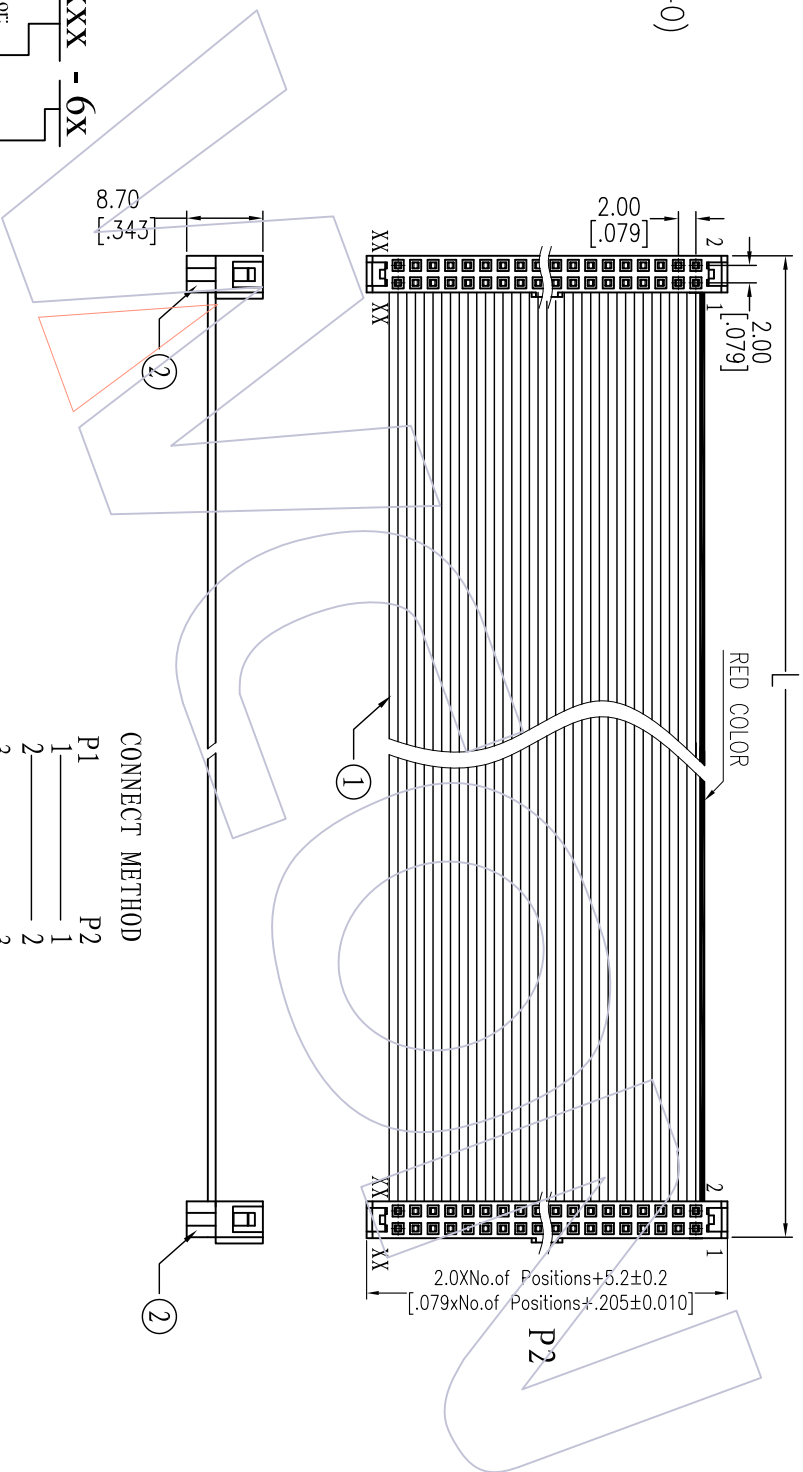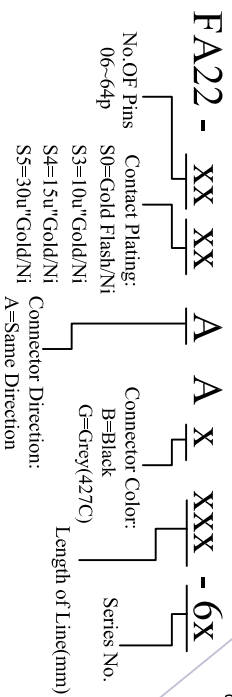

②	5221-XXUPXXXX01	CONN.	2.00 IDC **P PBT Black/Grey Phosphor Bronze Plating Xu" gold/ni With Bump	2	SET
①	F1U-B28GX0-XXXX-1	WIRE	UL2651 PHL.0mm XXP 28AWG(7/0.12TC) PVC Grey Marking Red Side	XXXX	MM
NO.	PART NO.	NAME	TITLE	QTY	UNIT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:
A0	2013/10/22	NEW	---	XX	JYHuang	2013/10/22	mm	A4	FA22-xxxxxAxxxx-6x	2.00 IDC T0 Side Contact To IDC T0 Side Contact Drawing
				XX	CHECK	DATE	SIZE	SHEET		
				XX	CHECK	DATE	SIZE	SHEET		
				Angle	APPROVE	DATE	PROJ.		Customer NO.	
				DM	TOL					



Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com