



# HSF

## SPECIFICATIONS:

Contact Resistance: 1Ω Max.  
 Insulation Resistance: 5MΩ Min.  
 Withstand Voltage: 300V AC  
 The Cable Assembly Must 100% Test

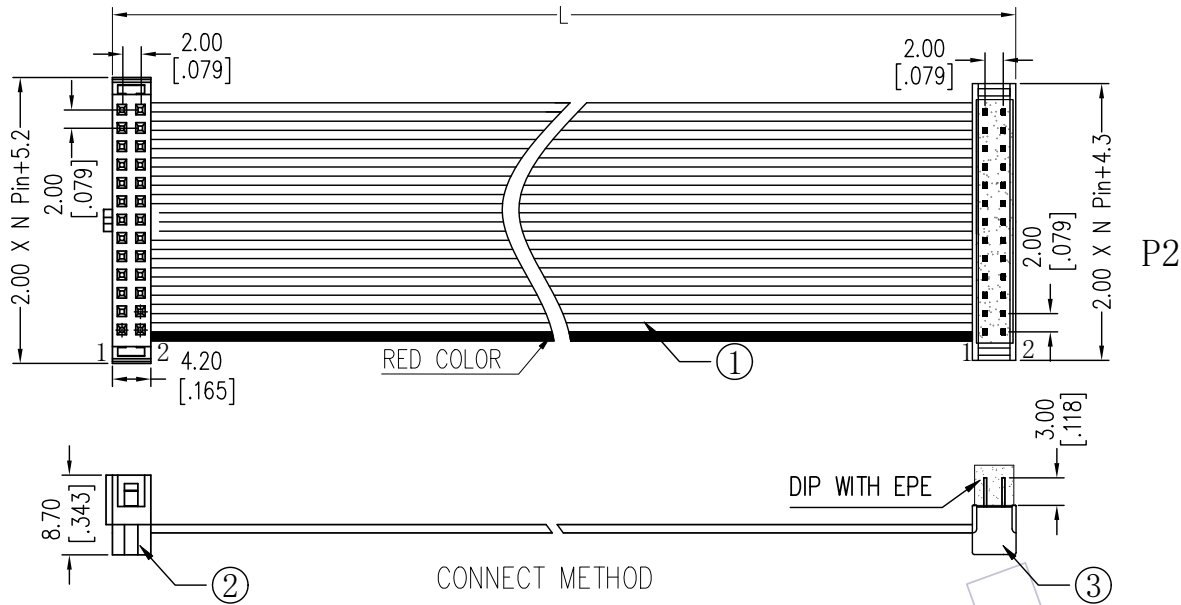

### CONNECT METHOD



## Ordering Information

FB22 - XX XX F A B XXX - 02

No. OF Pins: 06~64p  
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Ni, S3=10u"Gold/Ni, S4=15u"Gold/Ni, S5=30u"Gold/Ni, SN=Tin  
 Connector Color: B=Black  
 Connector Direction: F=same Direction  
 Wcon Code: 01~99  
 Length of Line(mm): XXX

LENGTH	TOLERANCE
≤100	±5
101~1000	±10
1001~3000	±20
3001~	± Lx1%

NO.	PART NO.	NAME	TITLE	QTY	UNIT
③	5320-XXPXXB01	CONN.	2.00 DIP Plug,XP,PBT BK,P/Bronze,Xu AU/Ni	1	PCS
②	5222-XXYPXXBW01	CONN.	2.00 IDC Socket,XP,Spring Type,W/T Bump,PBT BK,P/Bronze, Xu AU/Ni	1	PCS
①	F1U-B28GXXD0-XXXX-X	WIRE	1.00 Flat Cable,XP,PVC Grey,Red Side,UL2651,28AWG(7/0.12)	-	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020/11/09	NEW	-

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	XSR	2020/11/09	UNIT	mm [inch]	FB22-XXXXFABXXX-02
X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	2.0 DIP+2.0 IDC
Angle ± 3'			PROJ.		CUSTOMER NO.
DIM TOL					

PART NO.	TITLE	CUSTOMER NO.
FB22-XXXXFABXXX-02	2.0 DIP+2.0 IDC	

**WCON**  
 Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com