HSF

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PBT+30%G.F UL94V−0
激光打标"WCON"LOGO

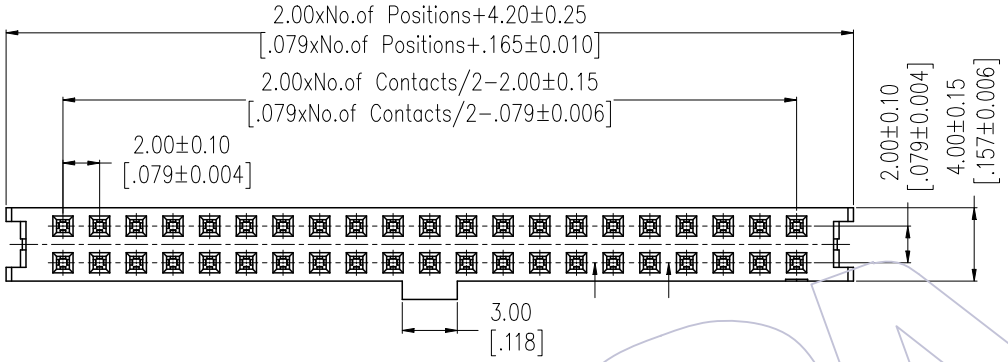



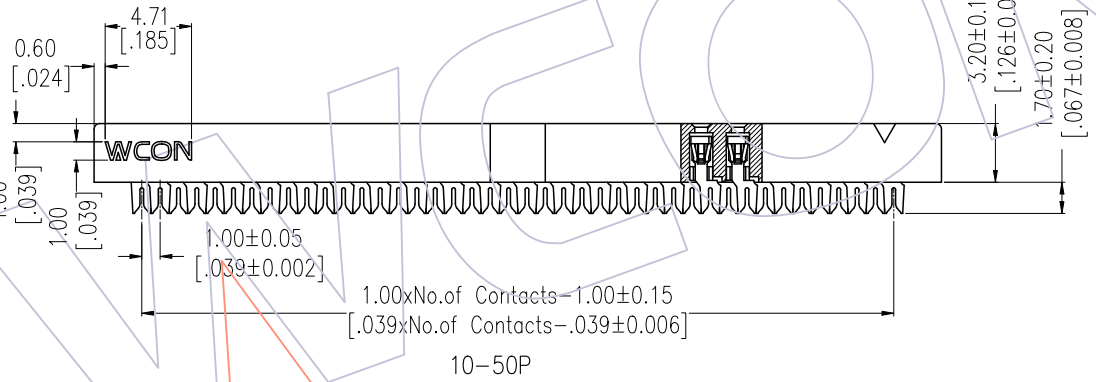

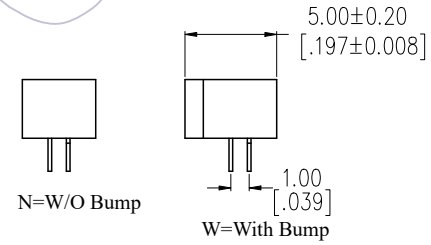

Ordering Information

5225- XX UP XX B X 0 1 W

- No.of Pins: 06P 24P, 08P 26P, 10P 30P, 12P 34P, 14P 36P, 16P 40P, 20P 44P, 22P 50P
- Contact Plating: S0=Gold Flash/Ni, S3=10u"Gold/Ni, S4=15u"Gold/Ni, S5=30u"Gold/Ni, SN=Tin
- Color Insulator: B=Black, G=Grey(427C)
- Bump: N=W/O Bump, W=With Bump

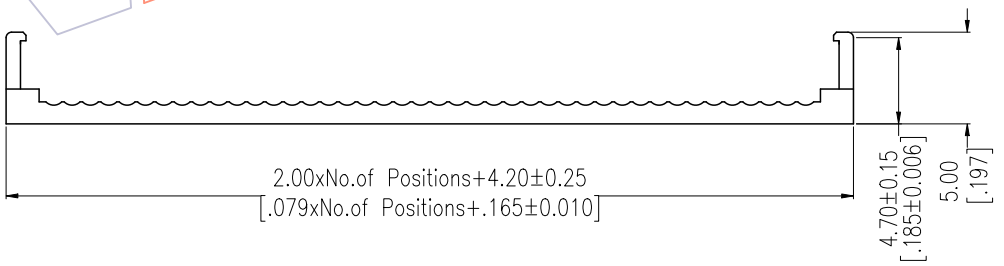



Item	Pitch	Mating
Standard	2.00	3124/3221
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018/11/08	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Ding	DATE	2018/11/08
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 5225-XXUPXXBX01W

TITLE: 2.00mm IDC SOCKET("S" TYPE) WITH LOGO

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com