








HSF

NOTES:
 Current Rating: 8A
 Voltage Rating: 300V
 Contact Resistance: 8milliohm Max
 Withstand Voltage: AC 1500V
 Insulation Resistance: 1000Megohm Min
 Screw Torque: 2 lbf.in
 Wire range: 16-30AWG
 Operation Temperature: -40°C to +105°C

Ordering Information:

P F 350 - C XX A SM W 1 N
 F=Female Pitch 350=3.50 No. of Pins 02-20P Contact Plated SM=Matte Tin Blank=W/T WCON Logo N=W/O WCON Logo
 Color A=Green Type W=With Screw

13P	55.80 ±0.30	42.00 ±0.30	A5		
12P	52.30 ±0.30	38.50 ±0.30	24P	94.30 ±0.40	80.50 ±0.40
11P	48.80 ±0.30	35.00 ±0.30	23P	90.80 ±0.40	77.00 ±0.40
10P	45.30 ±0.30	31.50 ±0.30	22P	87.30 ±0.40	73.50 ±0.40
9P	41.80 ±0.30	28.00 ±0.30	21P	83.80 ±0.40	70.00 ±0.40
8P	38.30 ±0.20	24.50 ±0.20	20P	80.30 ±0.40	66.50 ±0.40
7P	34.80 ±0.20	21.00 ±0.20	19P	76.80 ±0.40	63.00 ±0.40
6P	31.30 ±0.20	17.50 ±0.20	18P	73.30 ±0.40	59.50 ±0.40
5P	27.80 ±0.20	14.00 ±0.20	17P	69.80 ±0.40	56.00 ±0.40
4P	24.30 ±0.20	10.50 ±0.20	16P	66.30 ±0.40	52.50 ±0.40
3P	20.80 ±0.20	7.00 ±0.20	15P	62.80 ±0.40	49.00 ±0.40
2P	17.30 ±0.20	3.50 ±0.10	14P	59.30 ±0.30	45.50 ±0.30
PIN	A	B	PIN	A	B

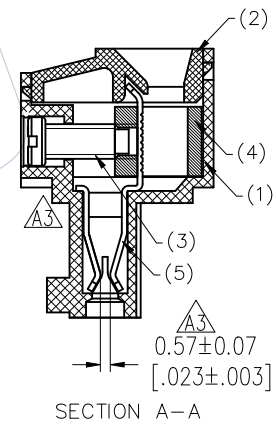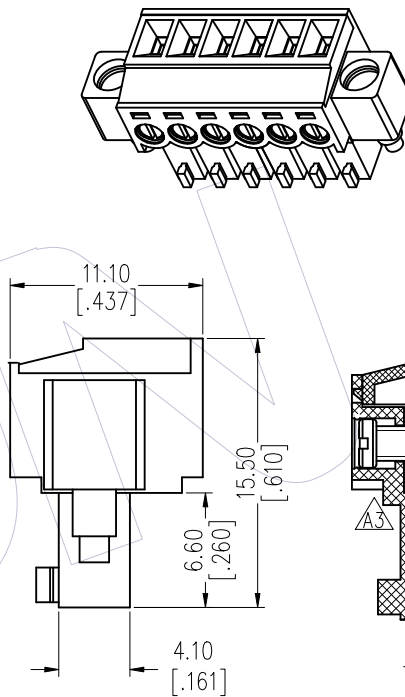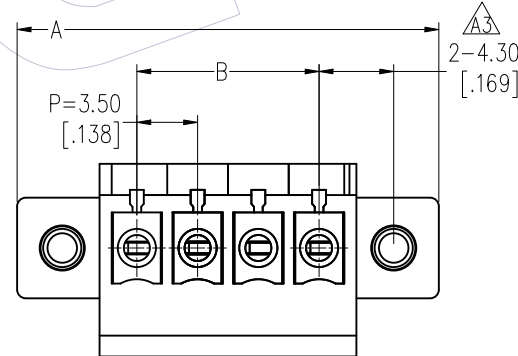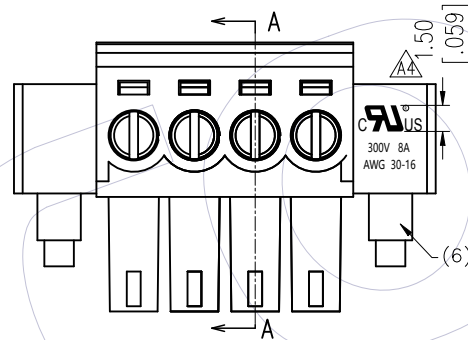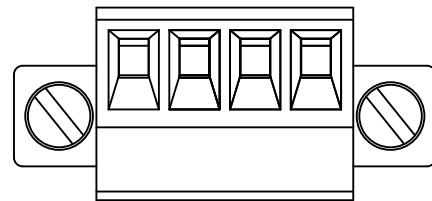

(6)	Screw-2	MCO25-1SZC01	2	C1018
(5)	Contact	TPT031-PSM001	N	C5191R-H T=0.3mm
(4)	Pin Block	BL020-1BNI01	N	C3604
(3)	Screw	MA020-1SXX01	N	C1018
(2)	Cover	XPC350-XXB1XN1	1	PA66 UL94-V0
(1)	Housing	XPF350-XXB1XW1(N)	1	PA66 UL94-V0
ITEM	TITLE	P/N	Q'TY	Material

A5	2023/10/18	ADD 21-24P	A5	XSR	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A4	2020/07/28	ADD LOGO; ADD W/O LOGO P/N	A4	XSR	X.X ±0.40	XSR	2023/10/18	UNIT	mm	PF350-CXXASMW1(N) A4
A3	2018/04/12	Modify Terminal; Add DIM.	A3	XSR	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2011/06/07	NEW			X.XXX ±0.15			SHEET	1/1	3.50mm Female
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		Angle ± 3°	APPROVE	DATE	PROJ.		Pluggable Terminal Blocks
					DIM TOL					Customer NO.

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57468408

Fax: +86 769 85358915 Fax: +86 512 57468468

E-mail: sales@wcon.com E-mail: salesks@wcon.com