

HSF







NOTES:

Rated Current: 3.0AMP
Contact Resistance: 20mΩ max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ min
Operation Temperature: -40℃ to +105℃

Insulator Material: PA66 (UL94-V0)

Use with: WF2549-T


Mated With: WF2549-Wafer

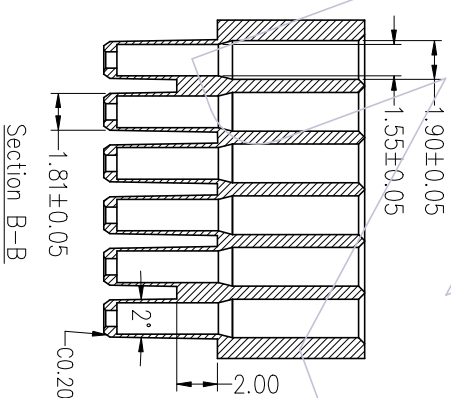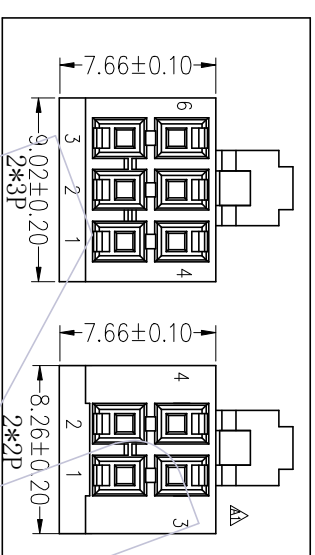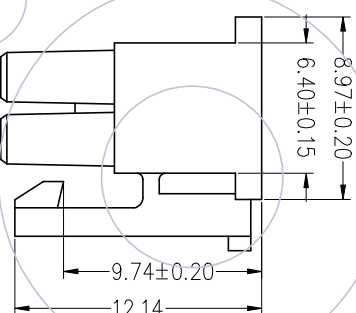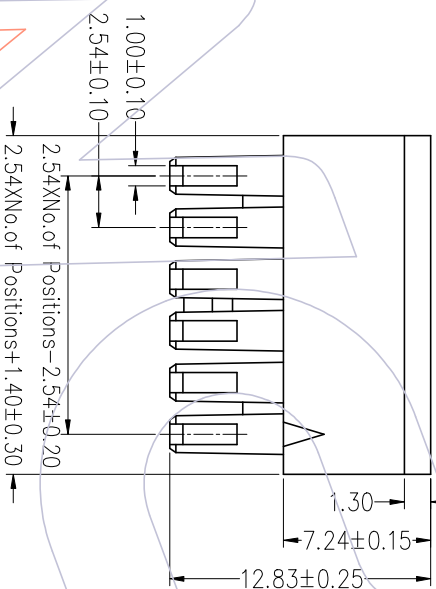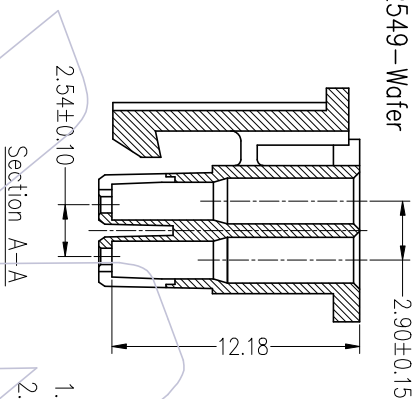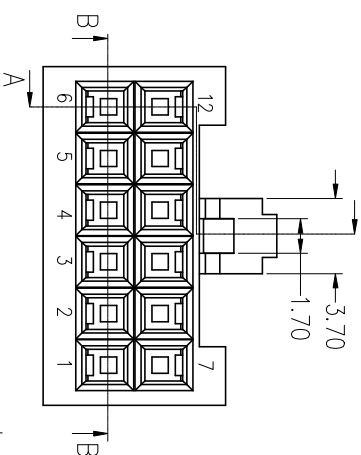

Ordering Information

WF2549A-2 H XX X 0 1

No. of Pins per Row: 03-25P
Colour: B=BLACK
Packing: 0=PE Bag

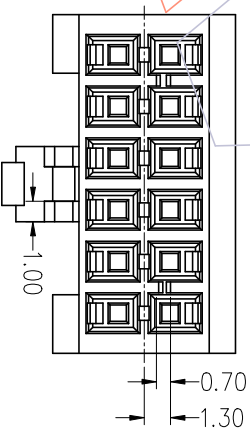

					OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	 Http: www.wcon.com WCON-Dongguan WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: sales@wcon.com			
					XX	±0.40	SU	2019/12/23	UNIT	mm inch						
A1	2019/12/23	Modify			XX	±0.25	CHECK	DATE	SIZE	A4		2.54mm wafer housing with foolproof design				
A0	2019/01/15	NEW			XXX	±0.15			SHEET	1/1						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.					
					DIM	TOL										