

HSF

NOTES:

Rated Current: 3.0A (22#AWG)

Rated Voltage: 48V

Contact Resistance: 20mΩ max

Withstand Voltage: 550V AC/Minute

Insulation Resistance: 500MΩ min

Operation Temperature: -40℃ to +105℃

Insulator Material: PA66,GF,UL94V-0,BK

Contact Material: Copper Alloy


Contact Plating: Gold Flash on Contact Area

Bright Tin on Solder Area

Nickel underplated overall

Sealing ring: Silica Gel,Red

Nut: PA66,GF,UL94V-0,BK

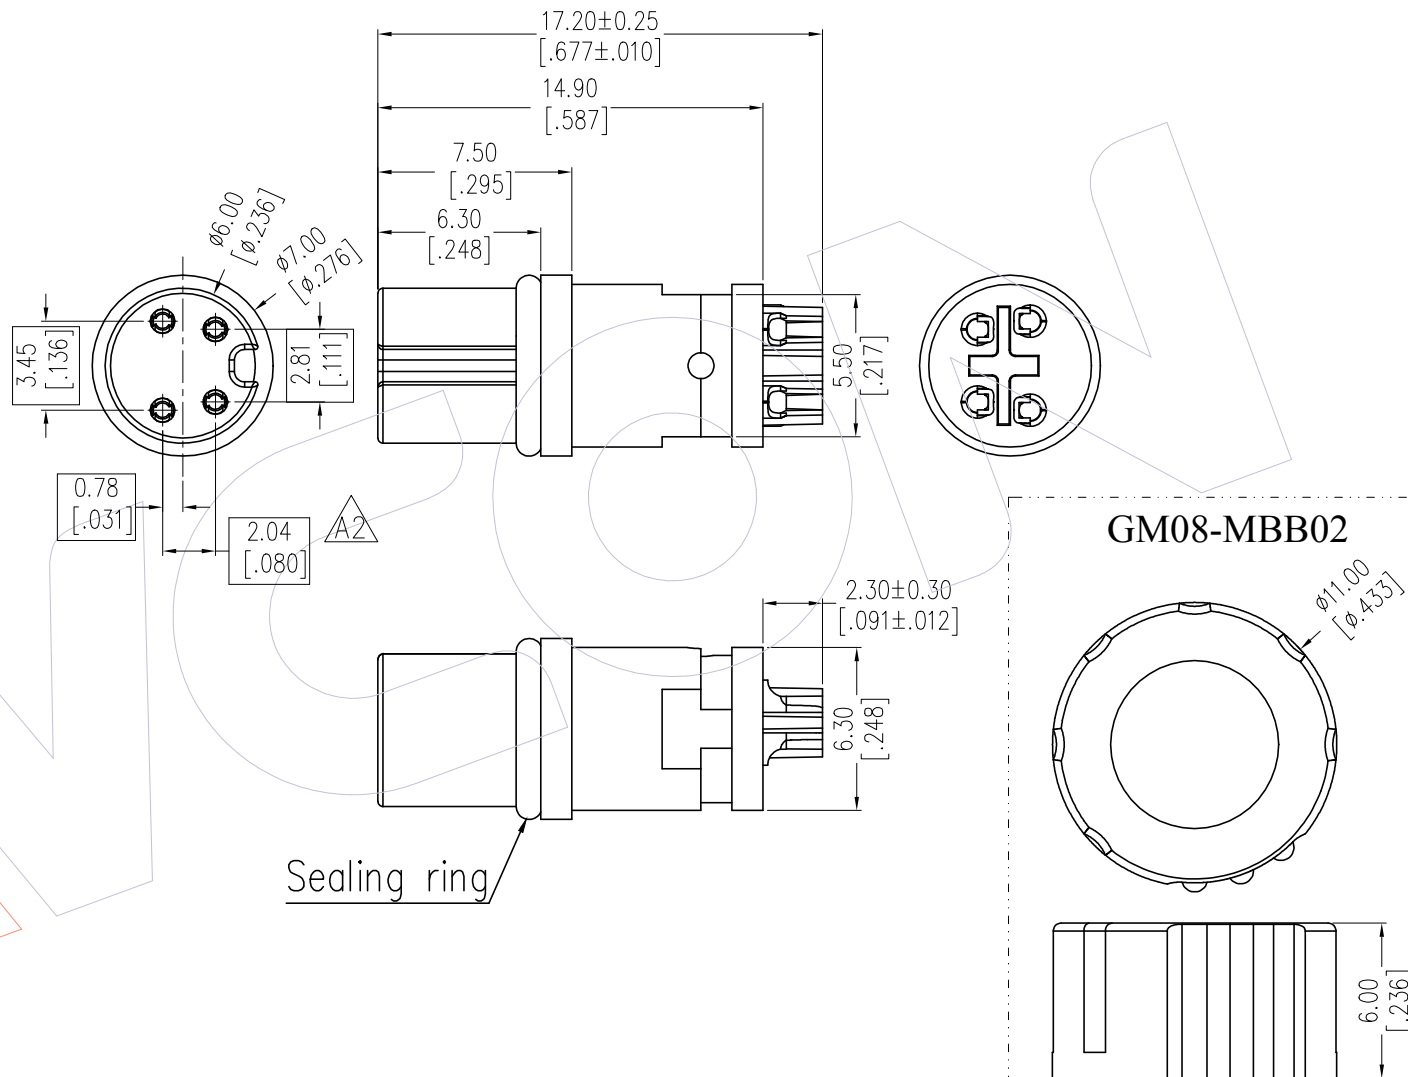

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2024.09.18	Update DIM	LYJ	X.X ±0.40	DreamsRain	2023.09.01	UNIT	mm [inch]	M08-11FSS0A0402
A1	2024.01.16	Update P/N	ZhuJ	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2023.09.01	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	M8 Circular connector Female
				Angle ± 3°			PROJ.		Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com